



Fig. 2

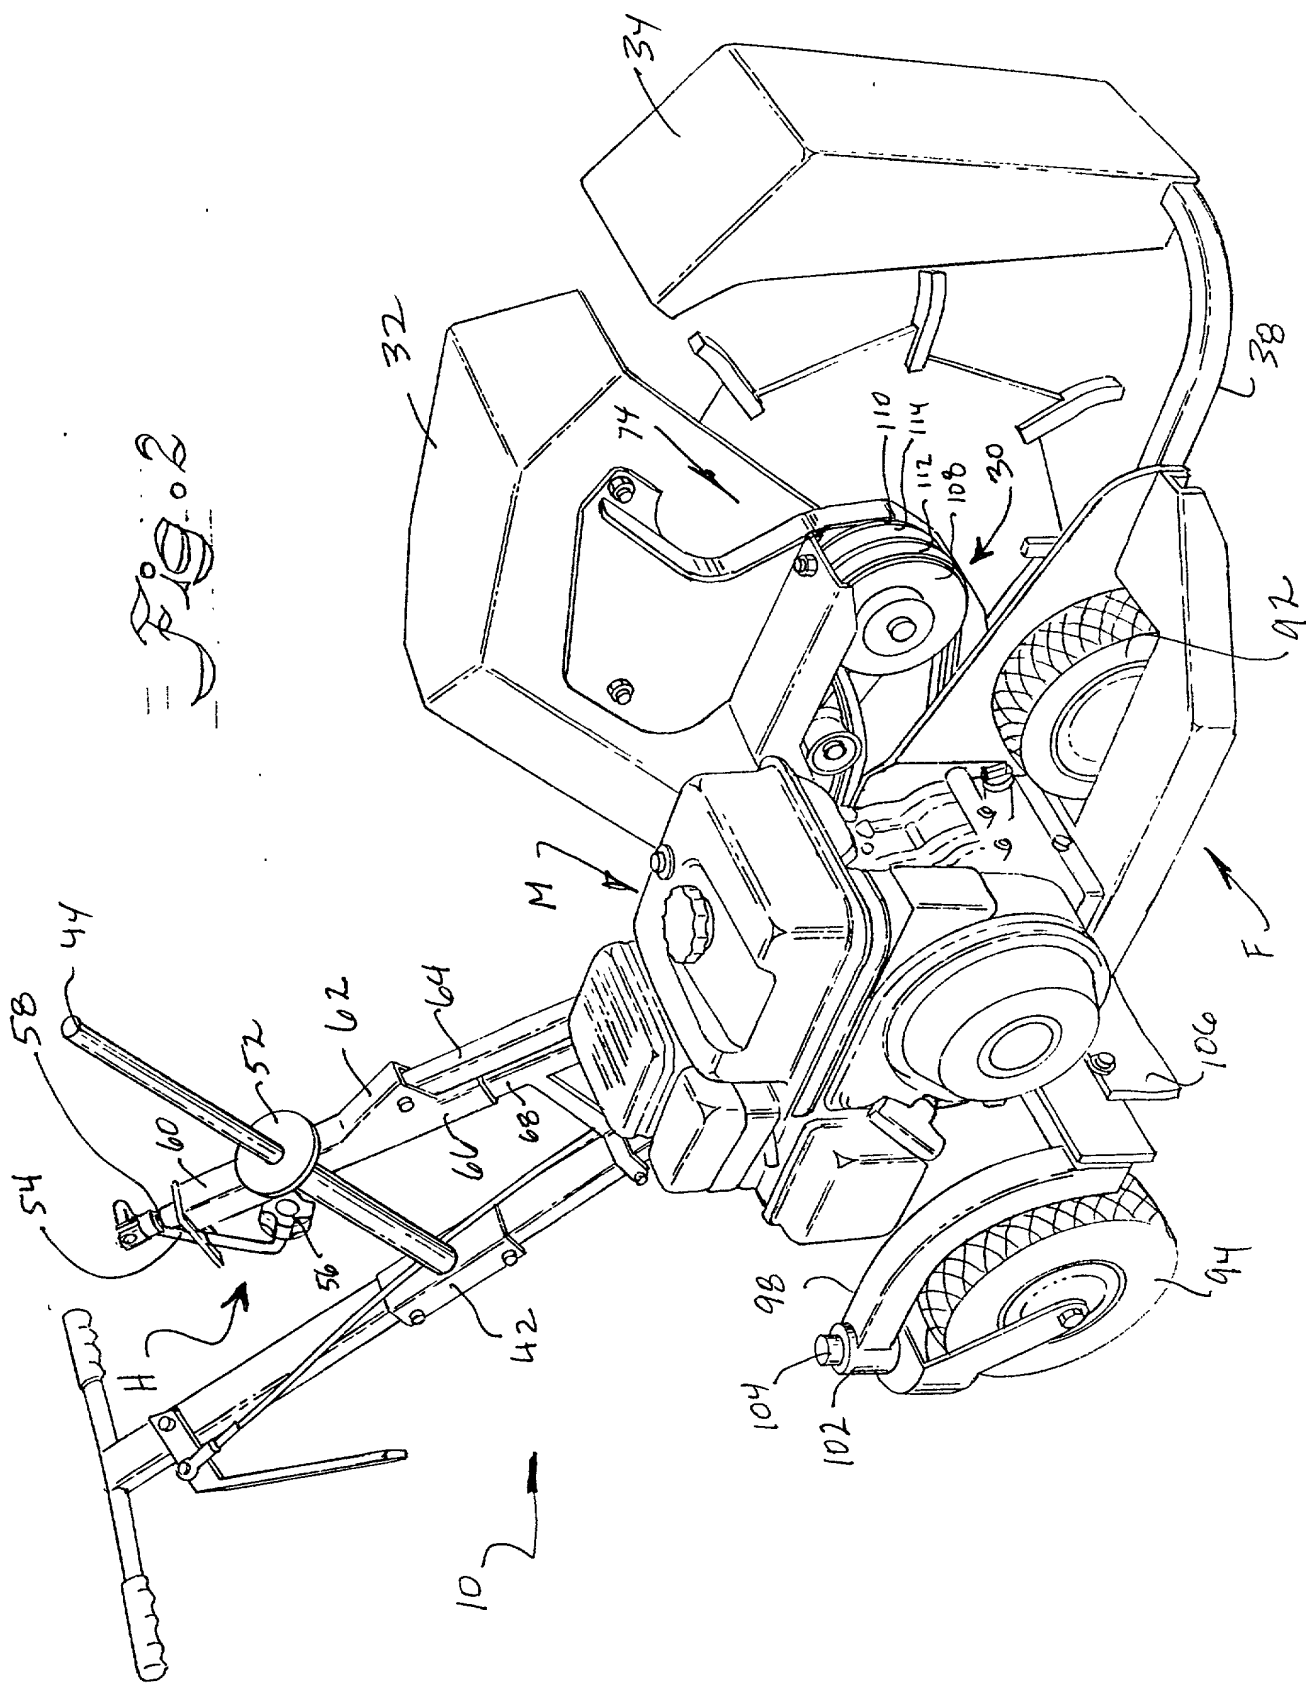
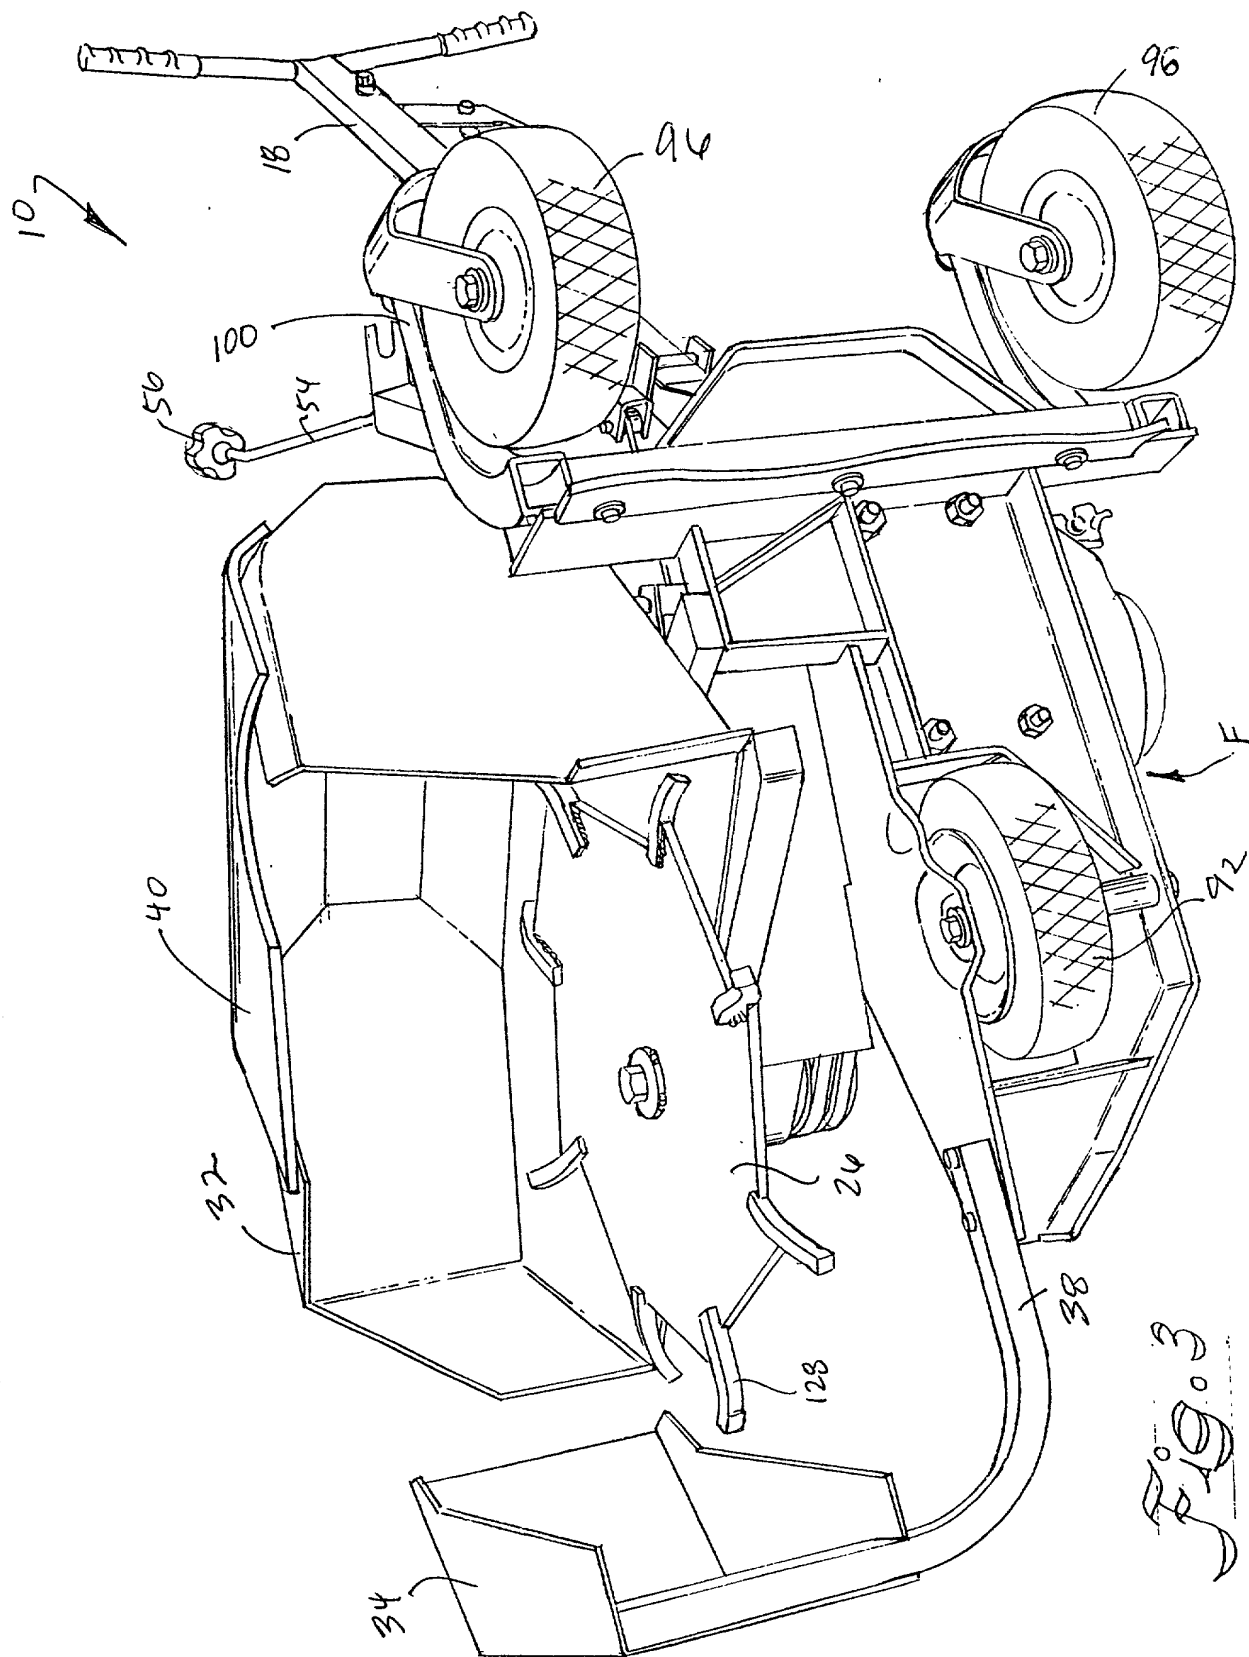
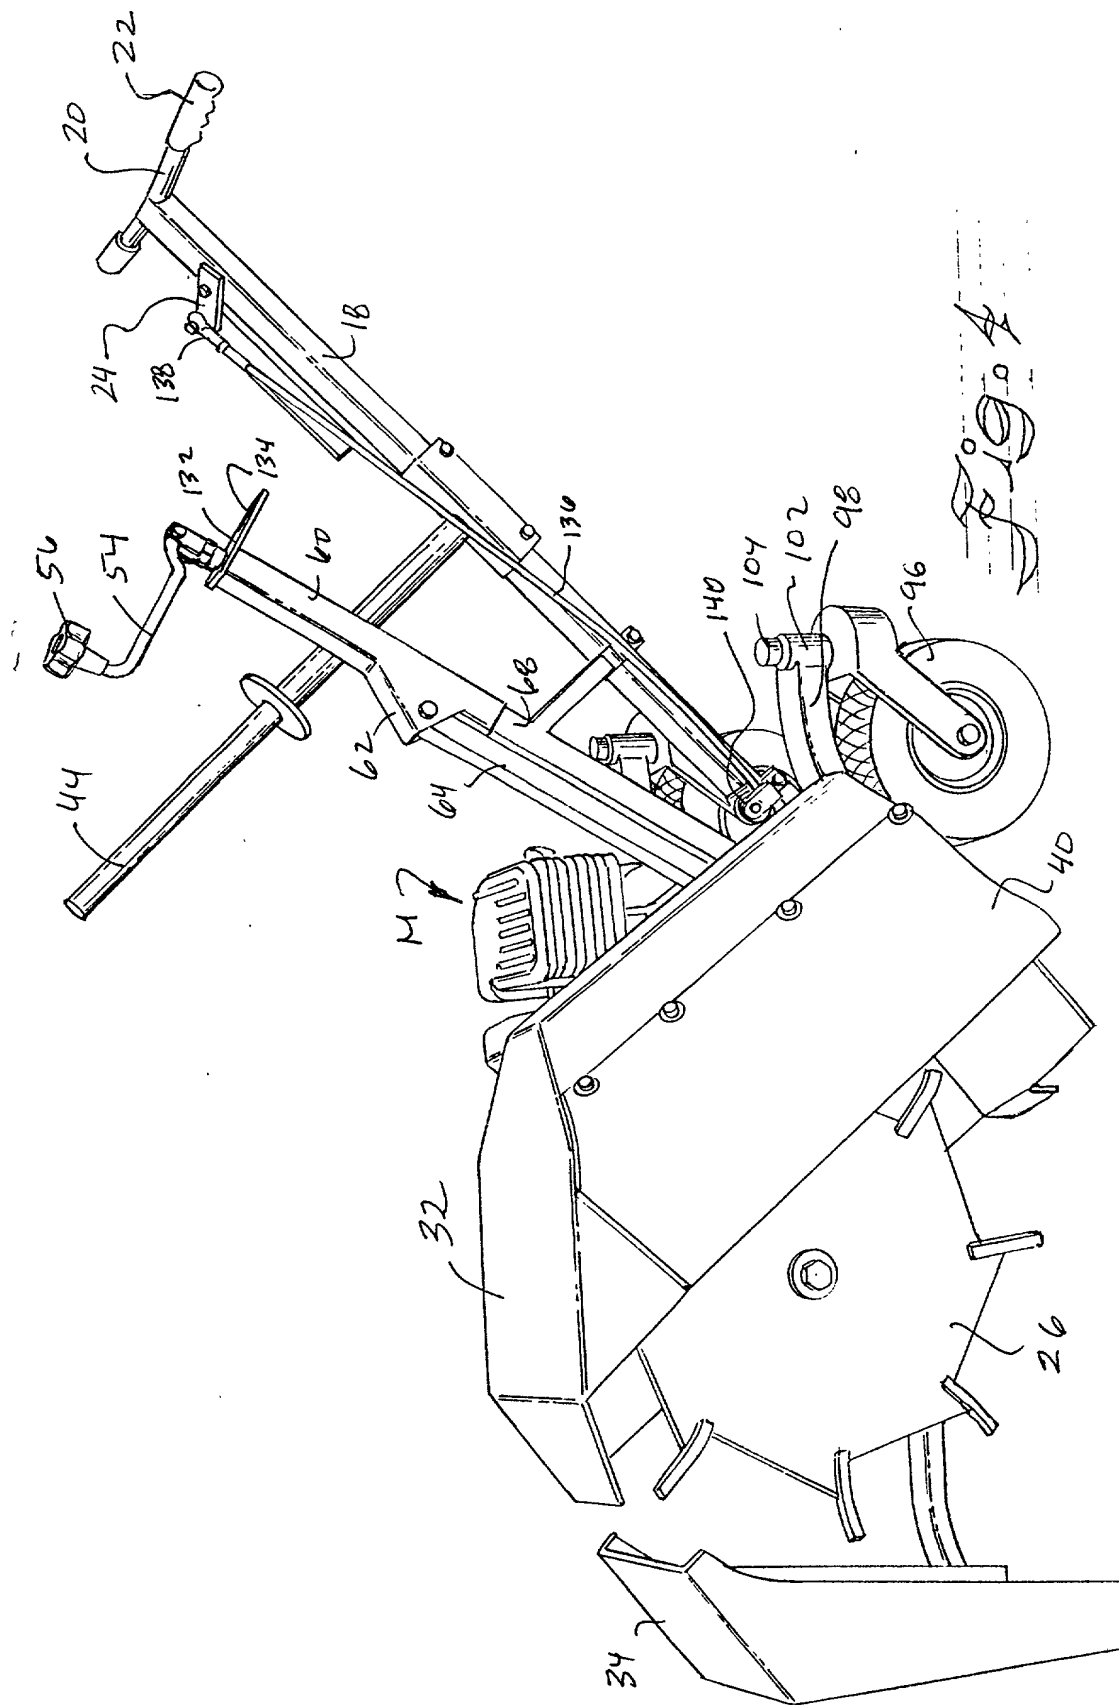


FIG. 19.03





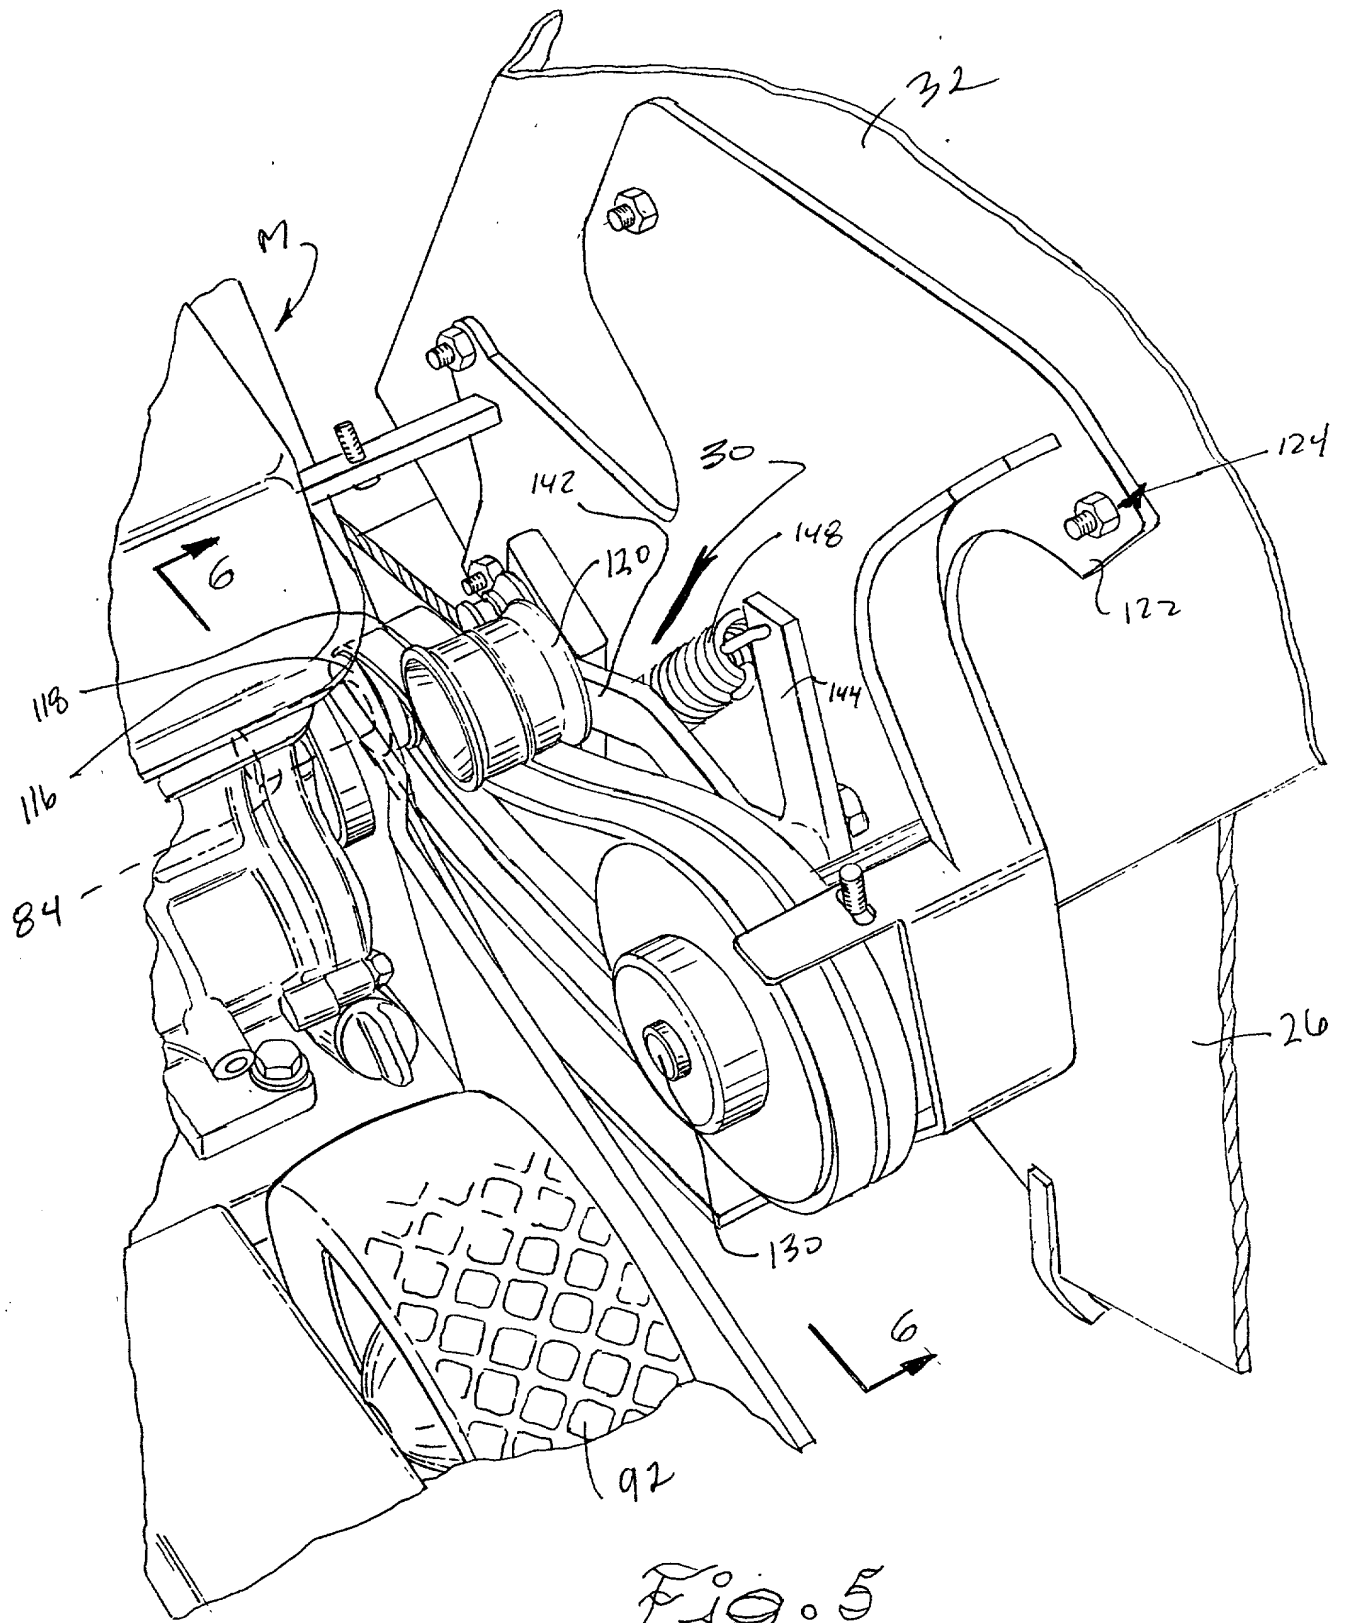


Fig. 5

096647.092801

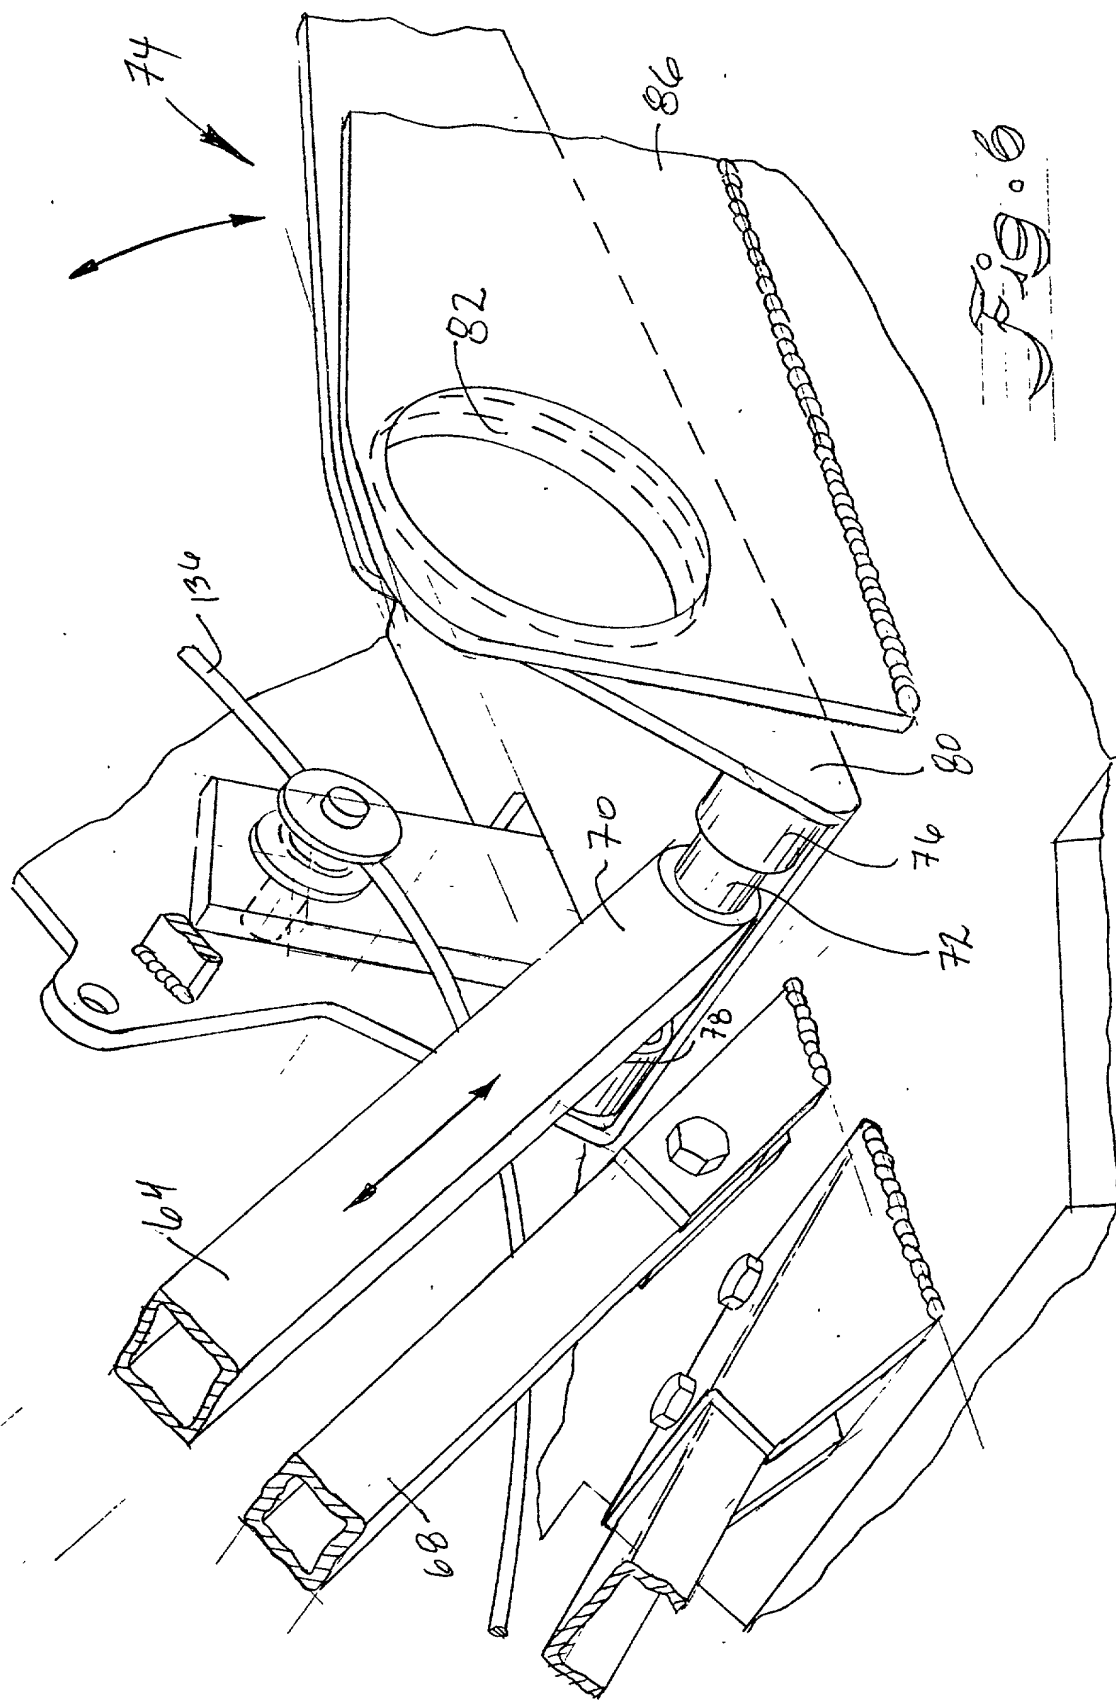
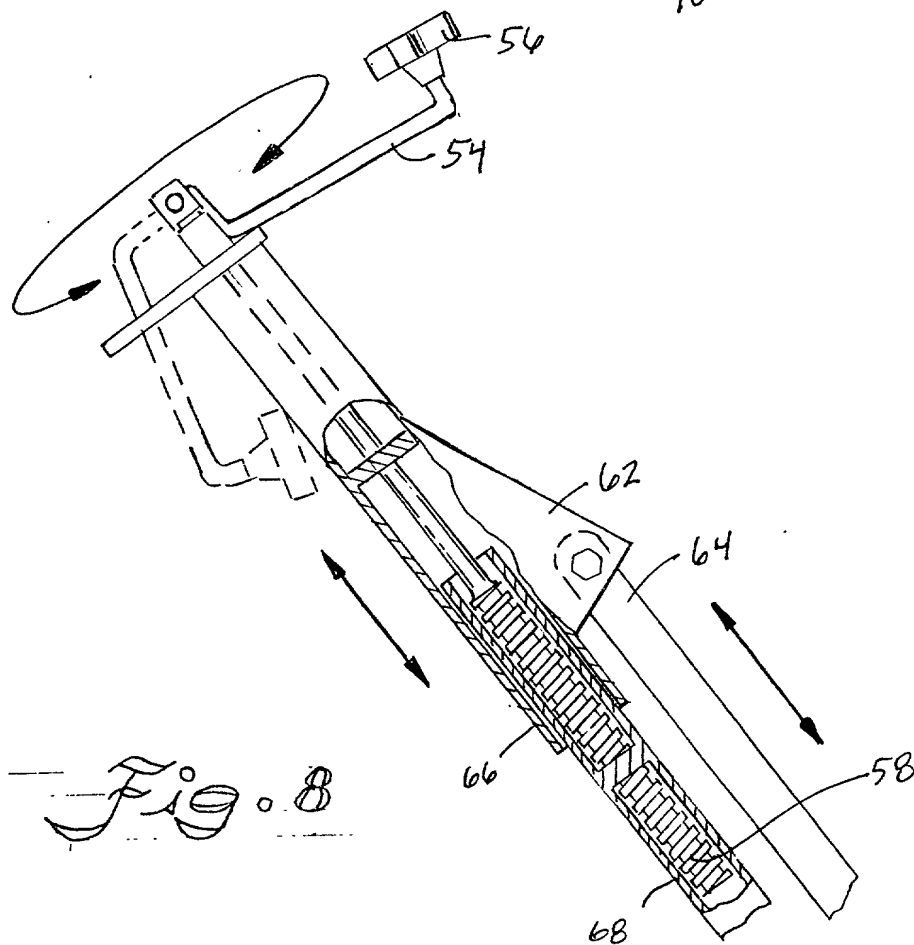
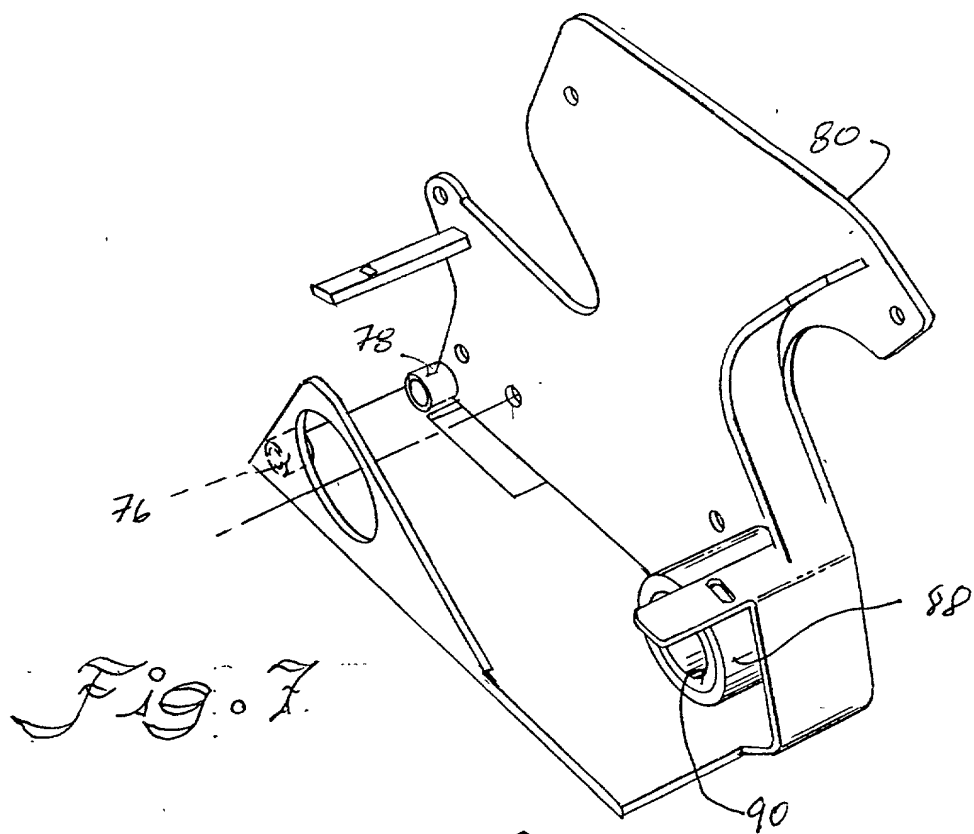


Fig. 6





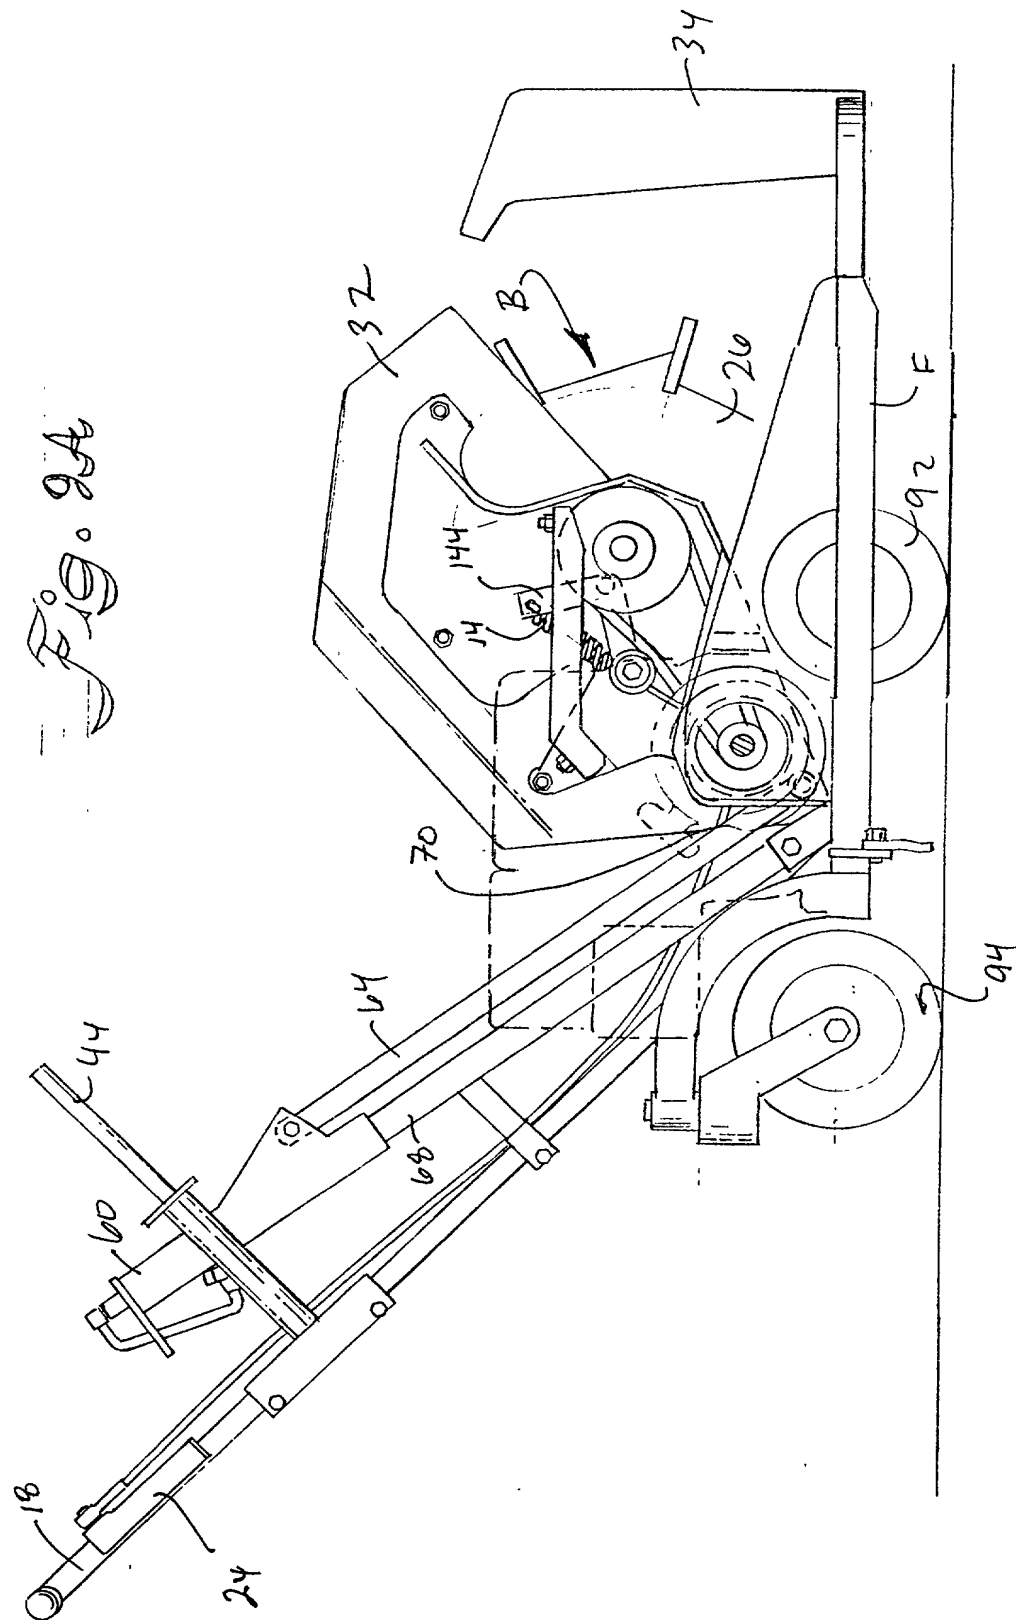




Fig. 9B

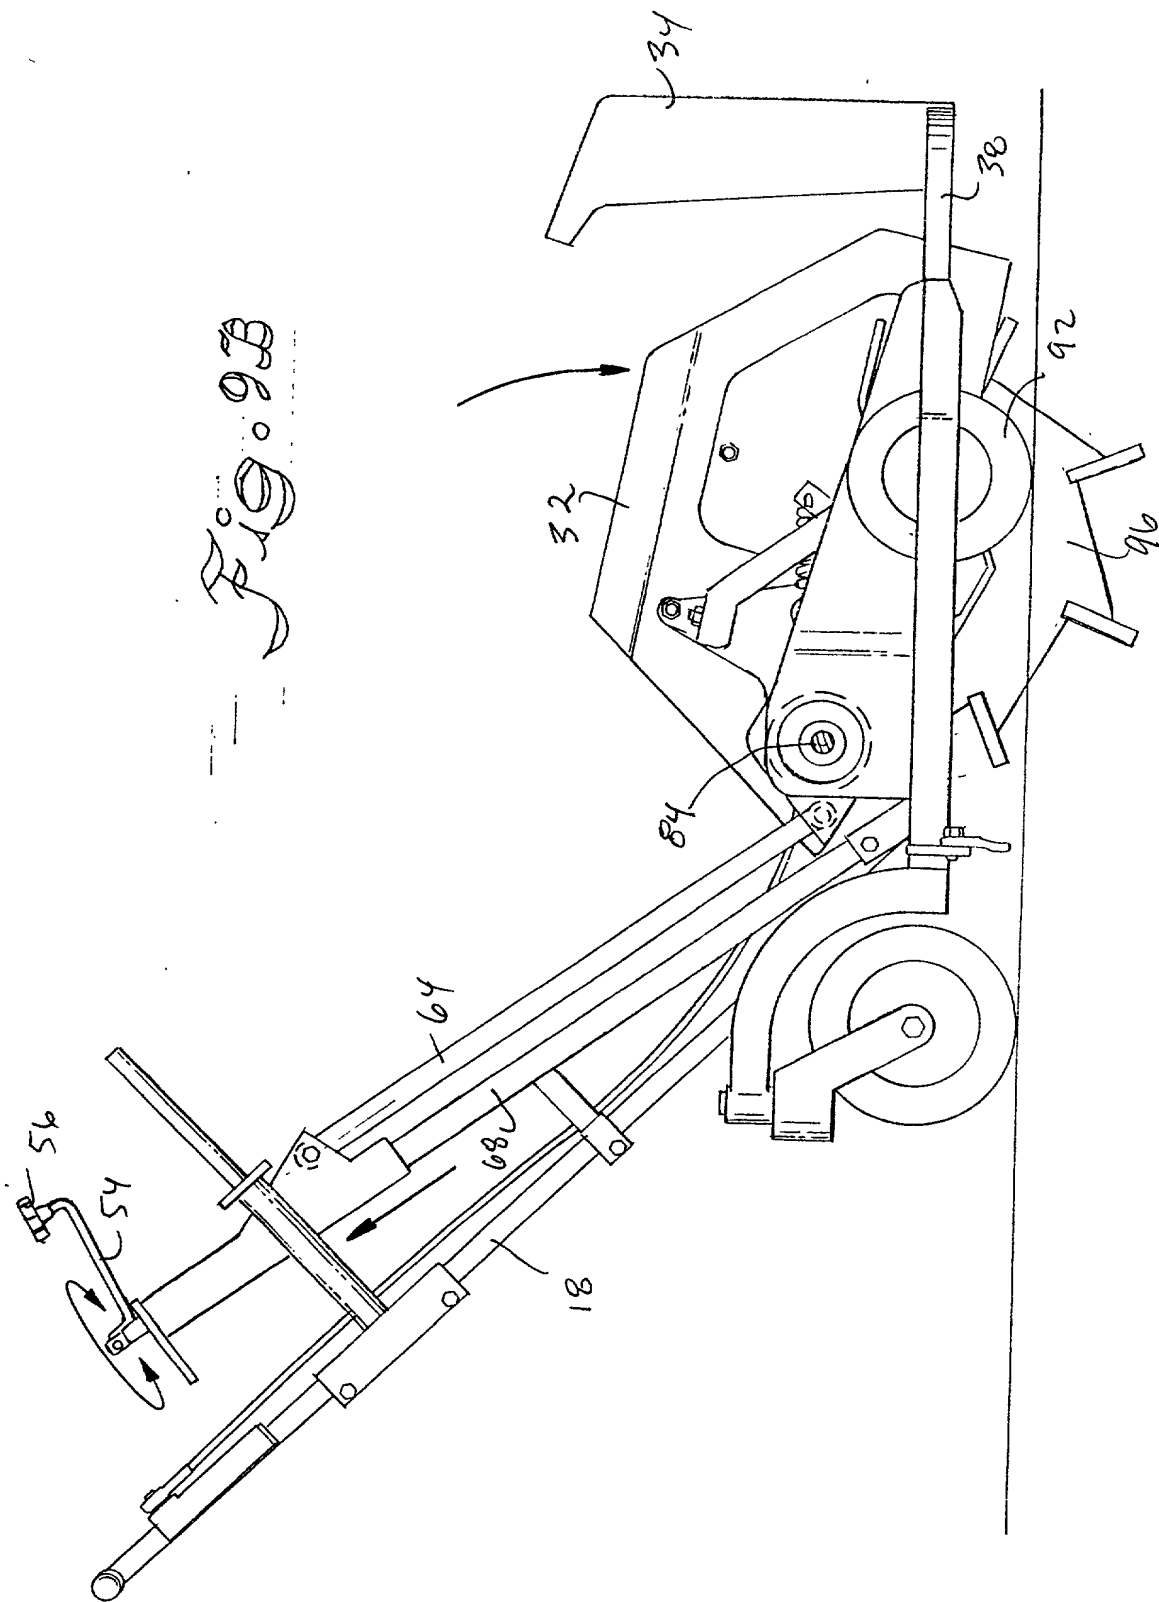

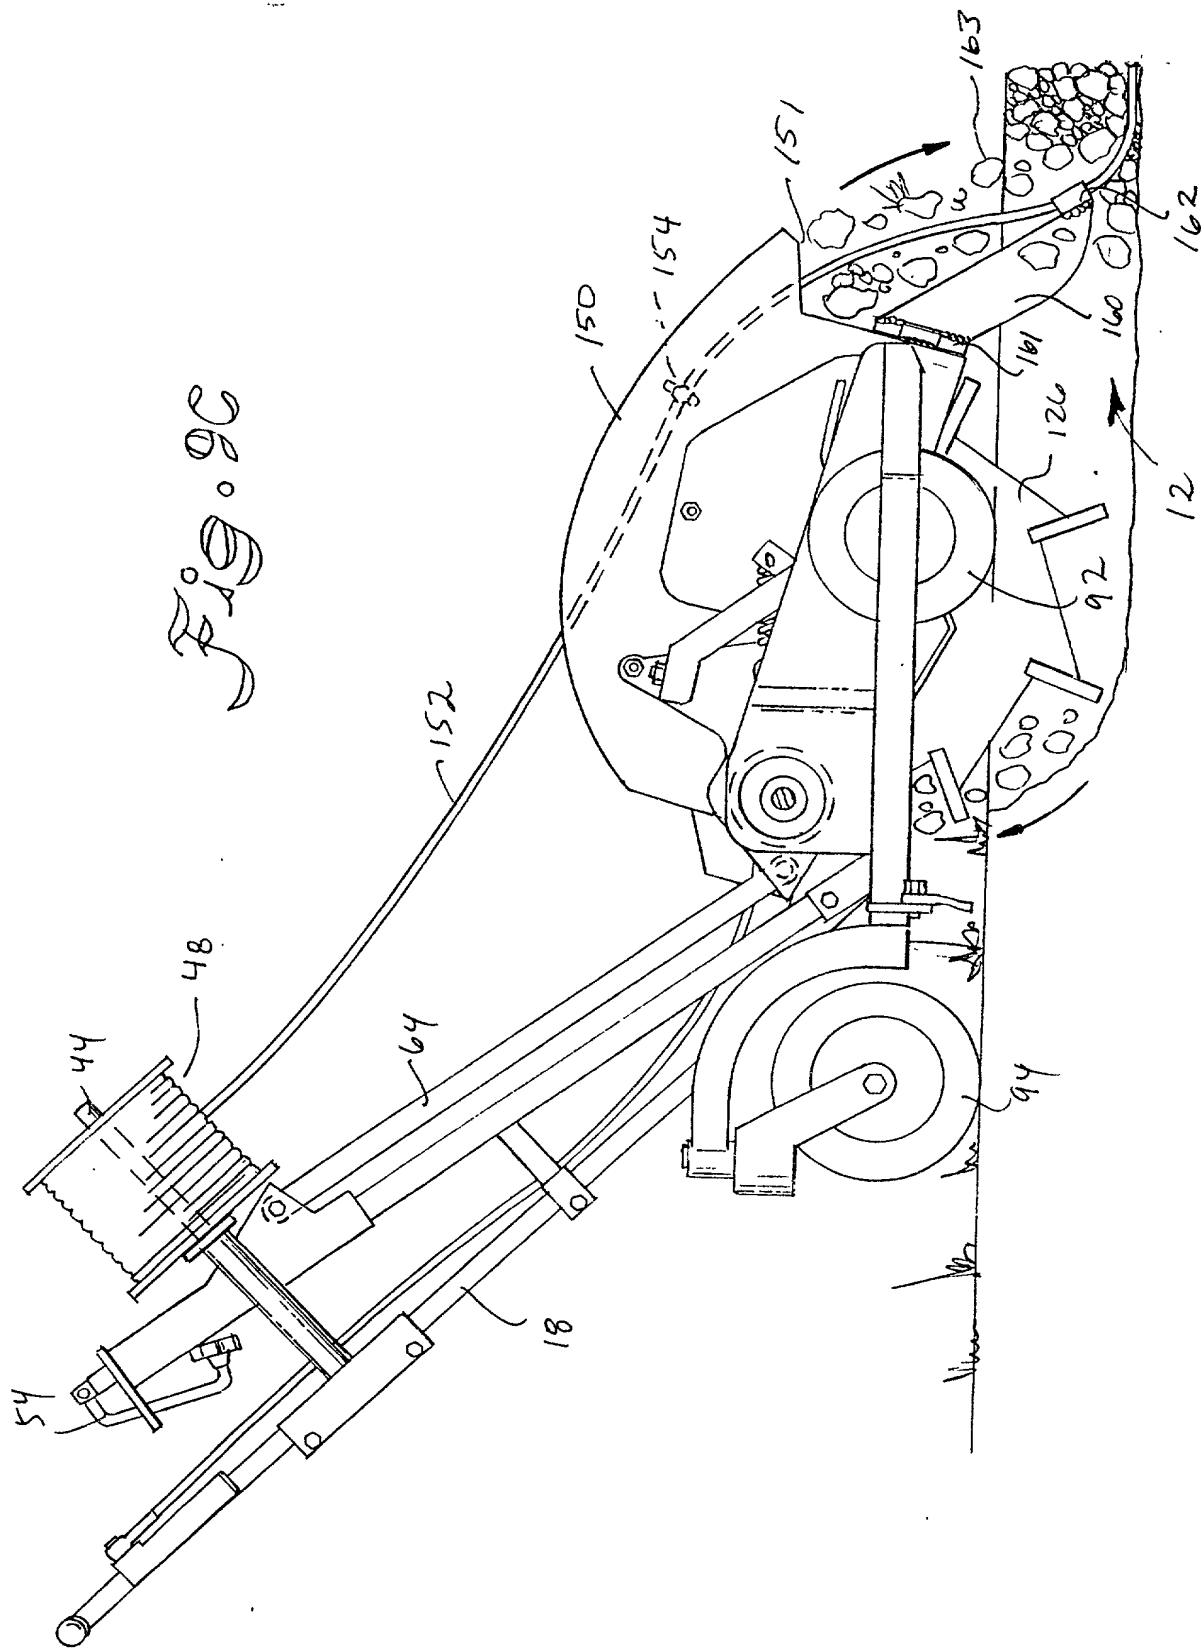

09966477.092801

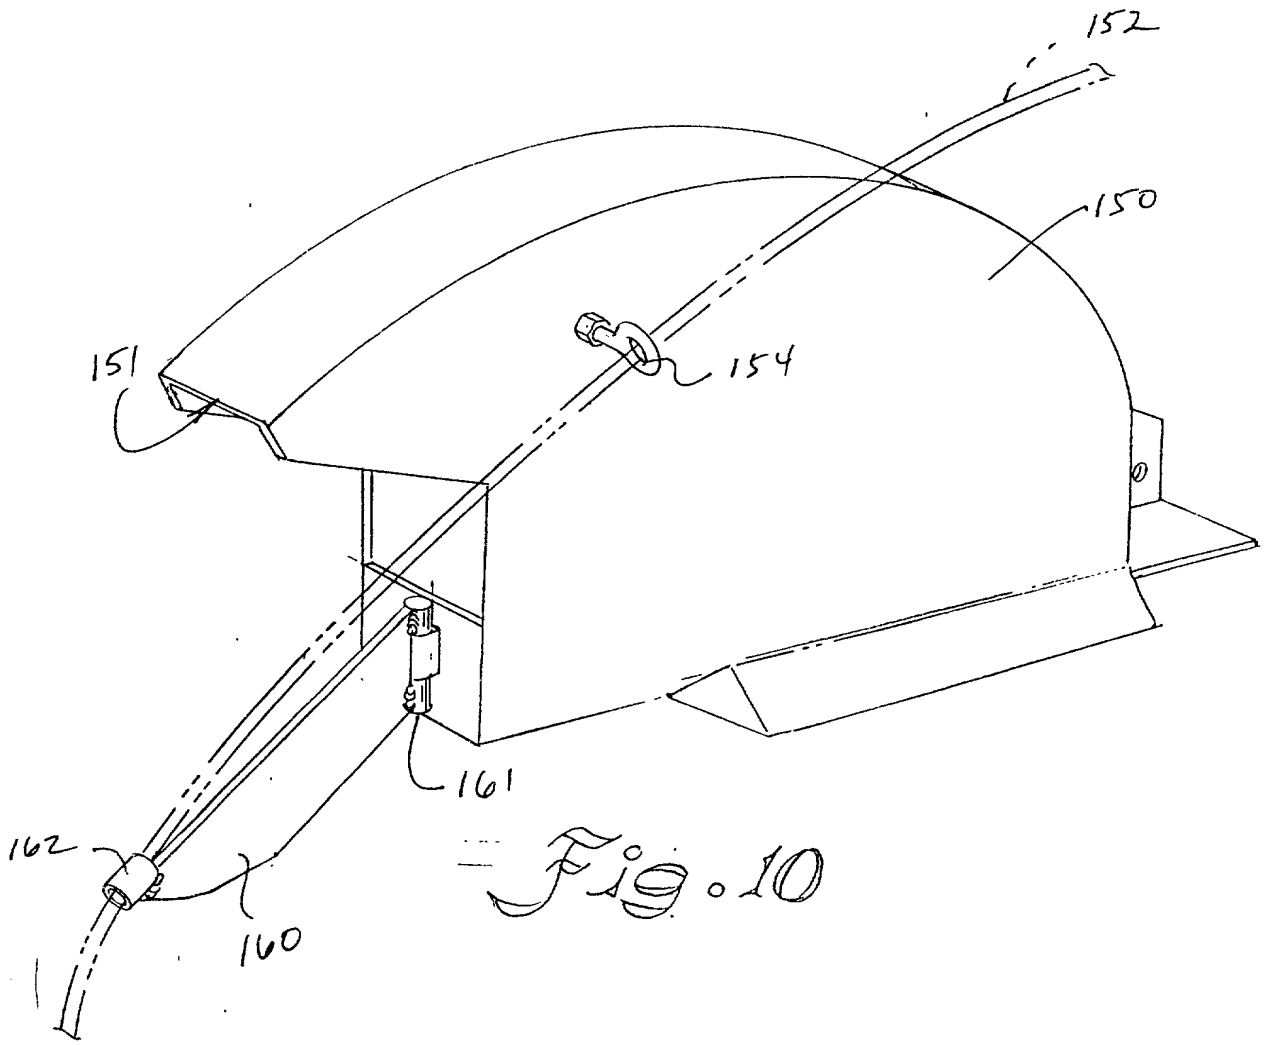


Fig. 10

FIG. 2 is a perspective view of the device 200. The device includes a base 202 and a support structure 204. A central opening 214 is formed in the base 202, and a circular feature 216 is located on the support structure 204. The device is shown with curved strips 220 and 222. A dashed line 230 indicates a cross-section of the device.

Fig. 11



0966477.092804

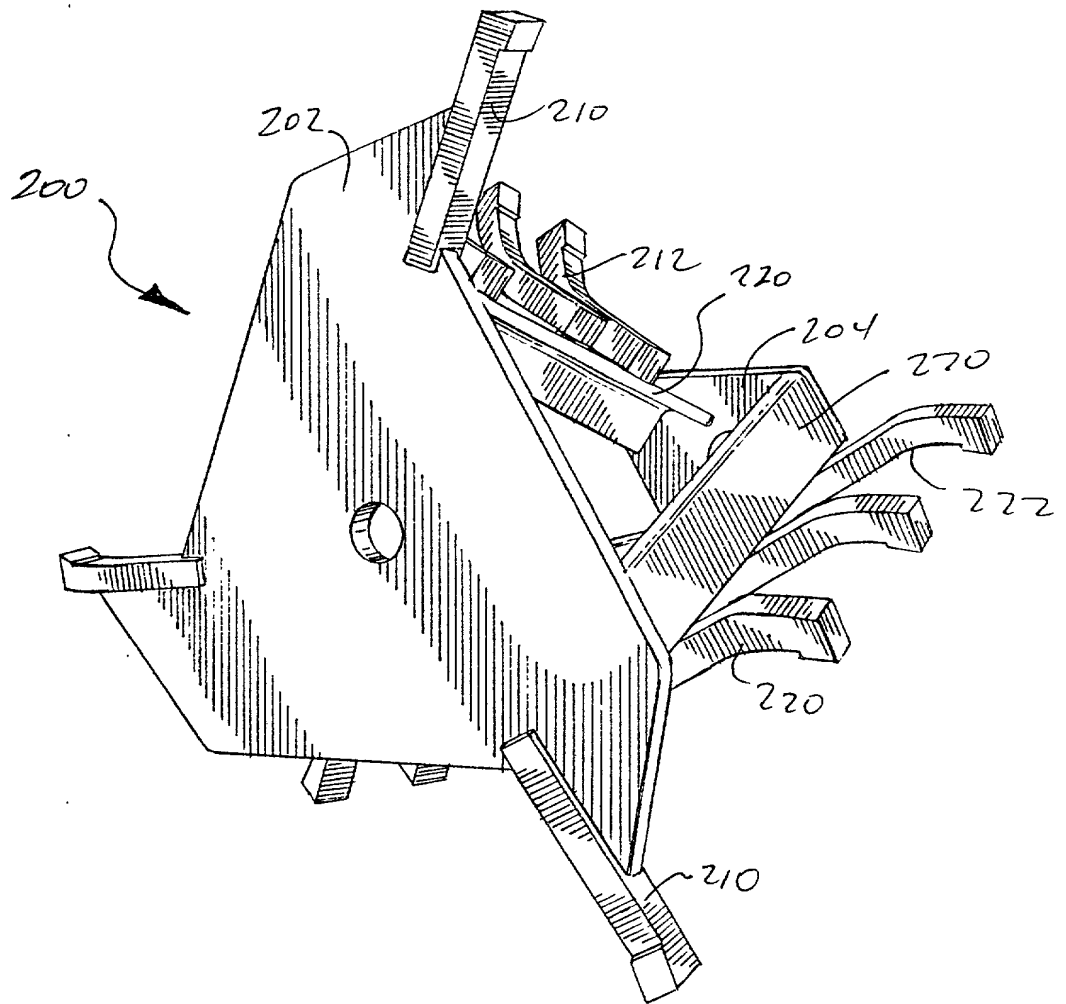


Fig. 13

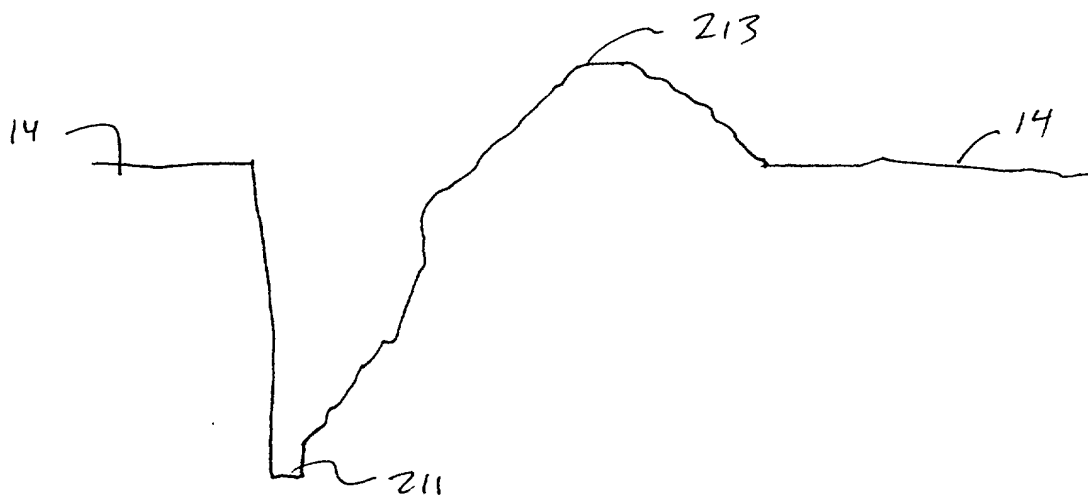


FIG. 14

09366477.092801

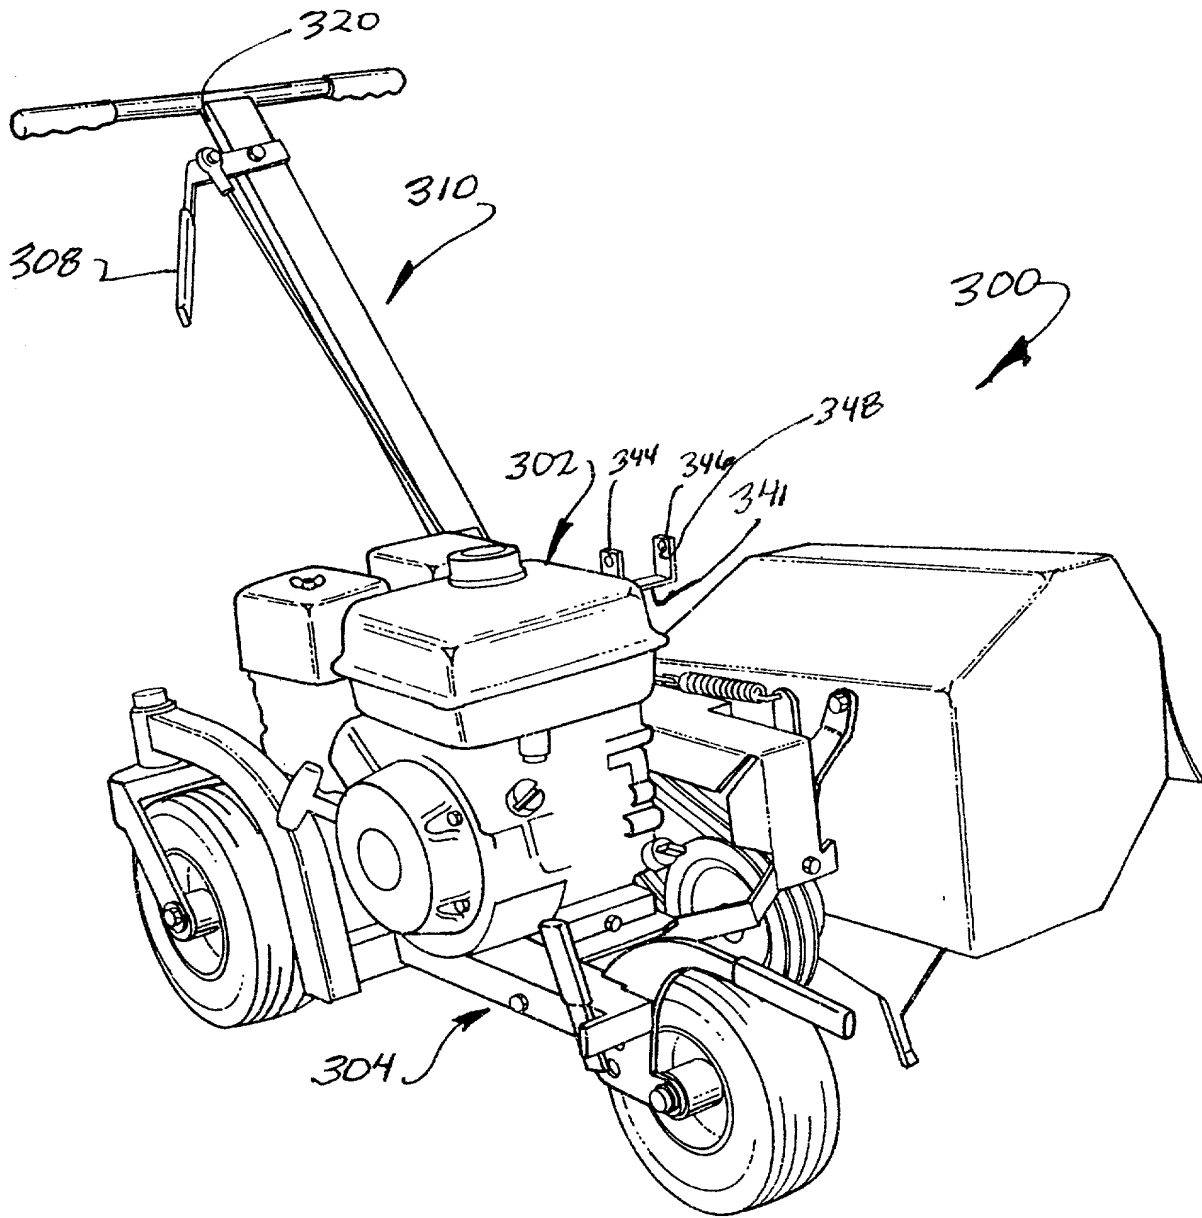


Fig. 15



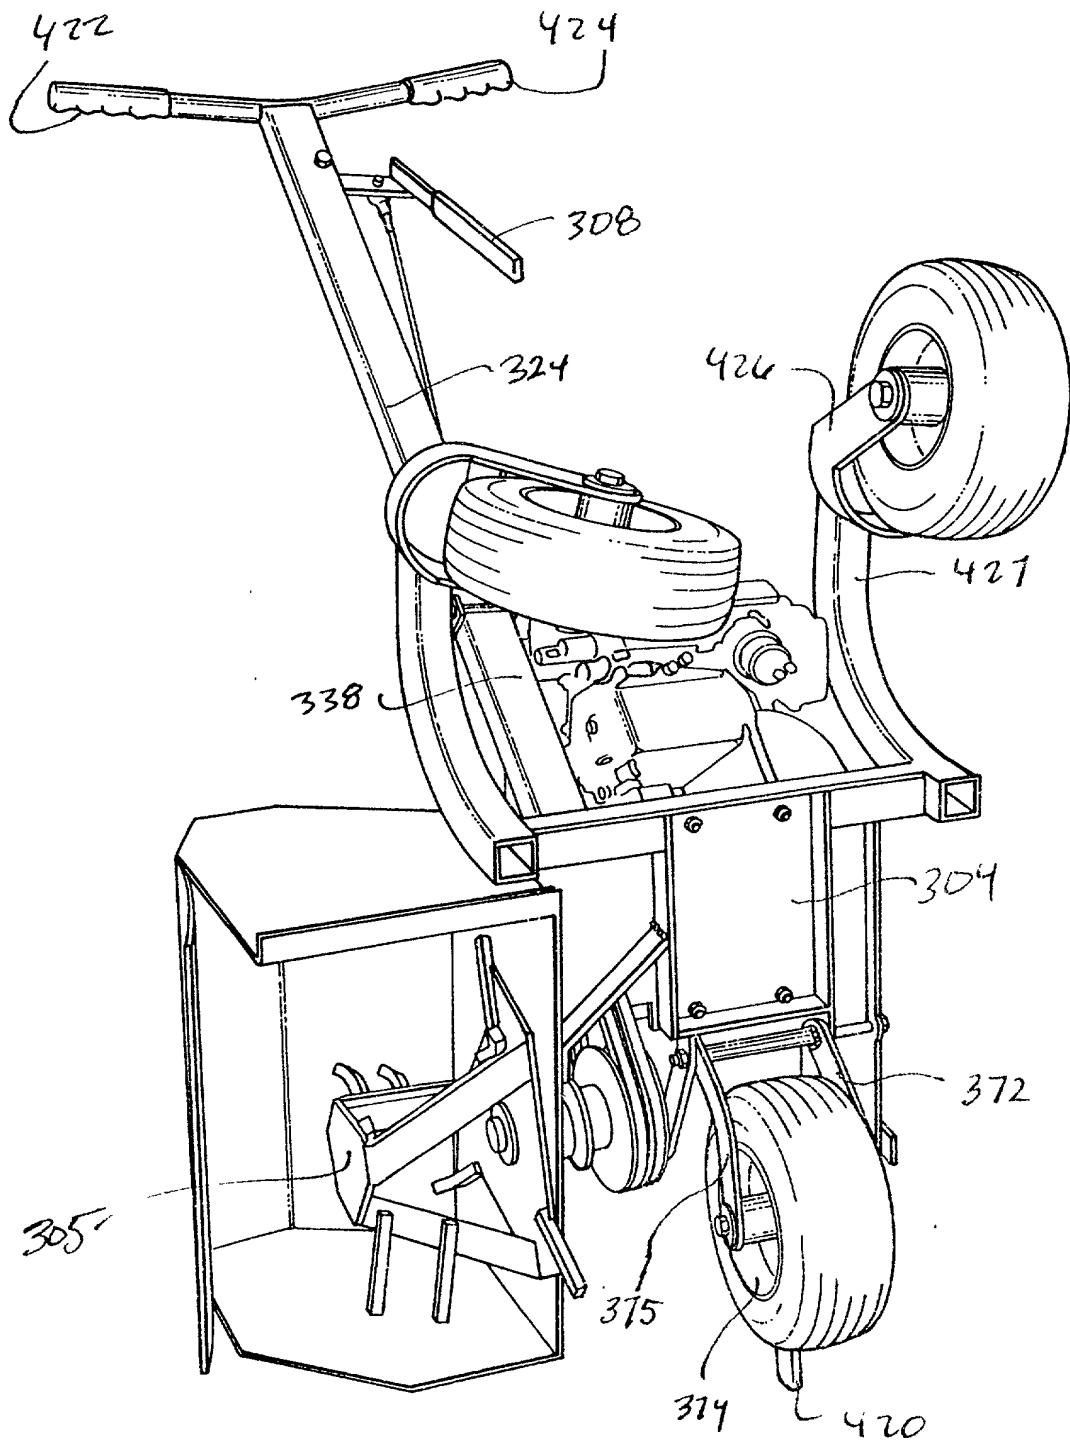


Fig. 16

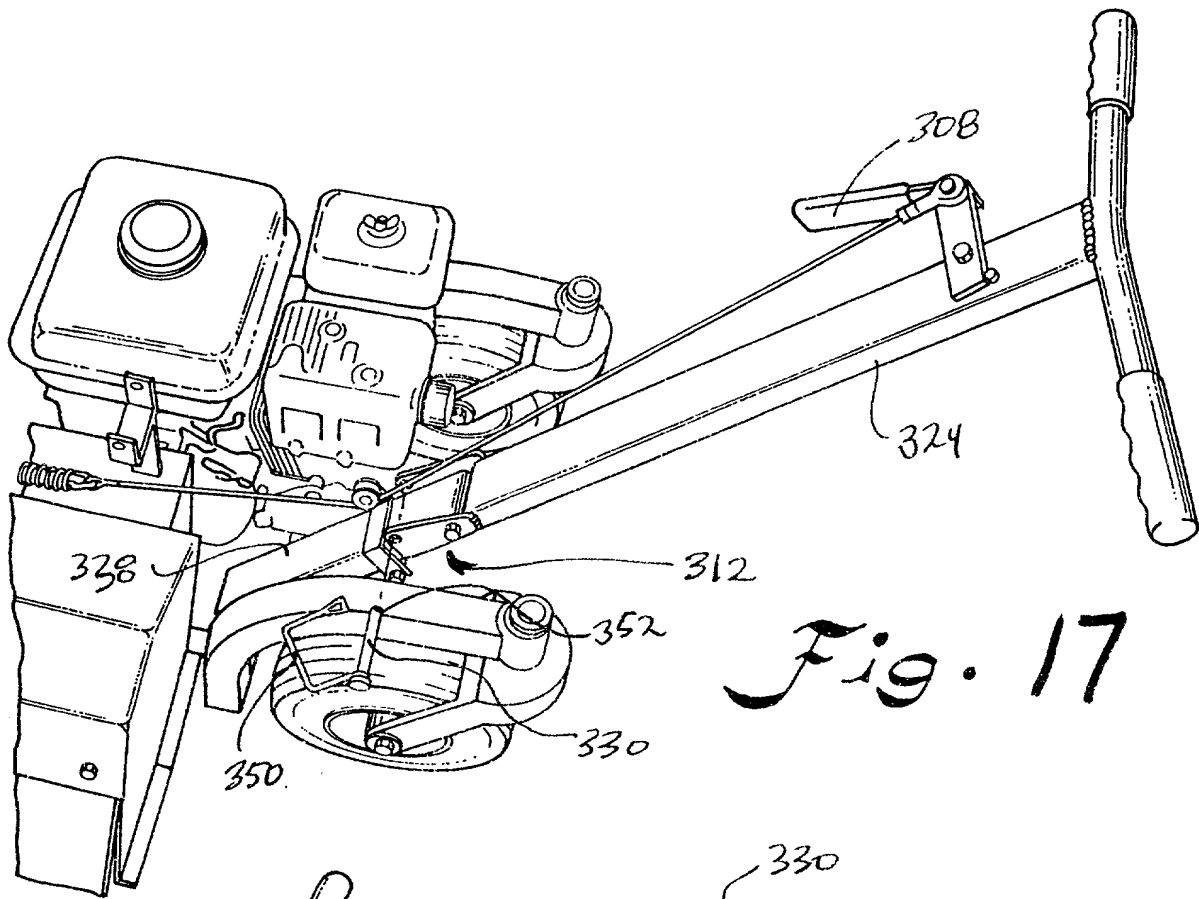


Fig. 17

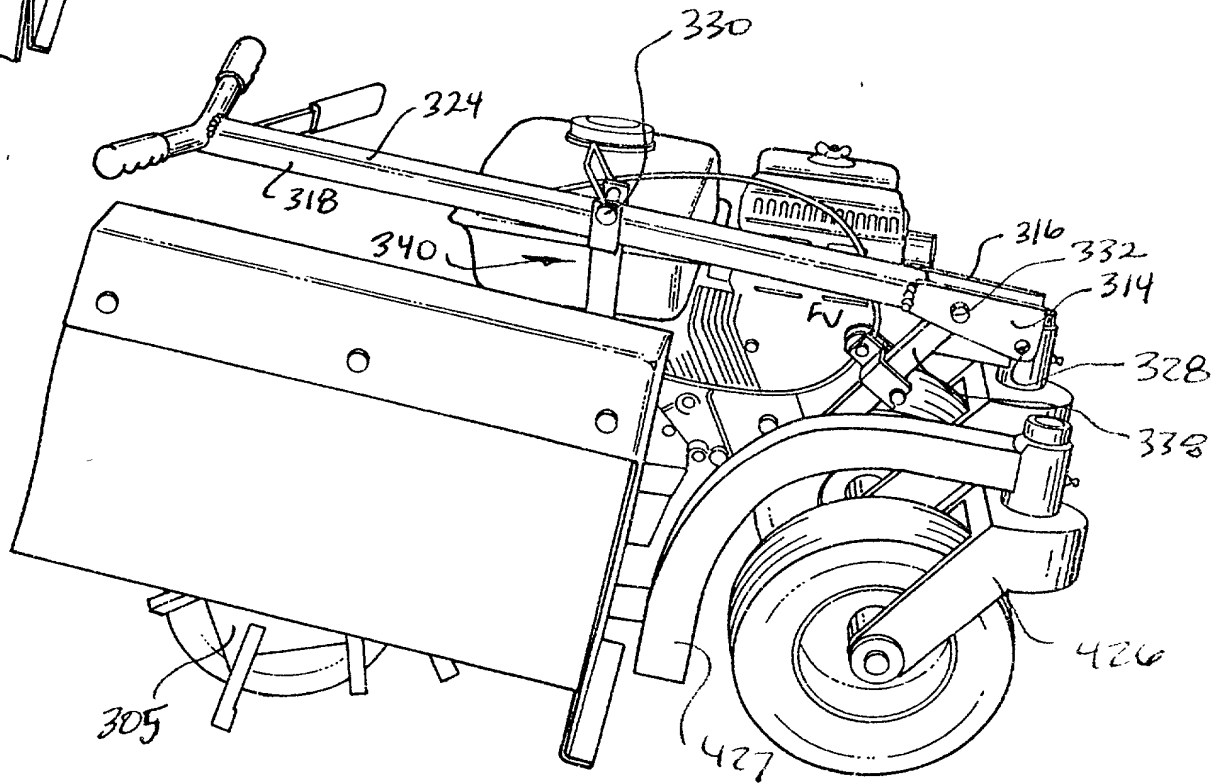


Fig. 18

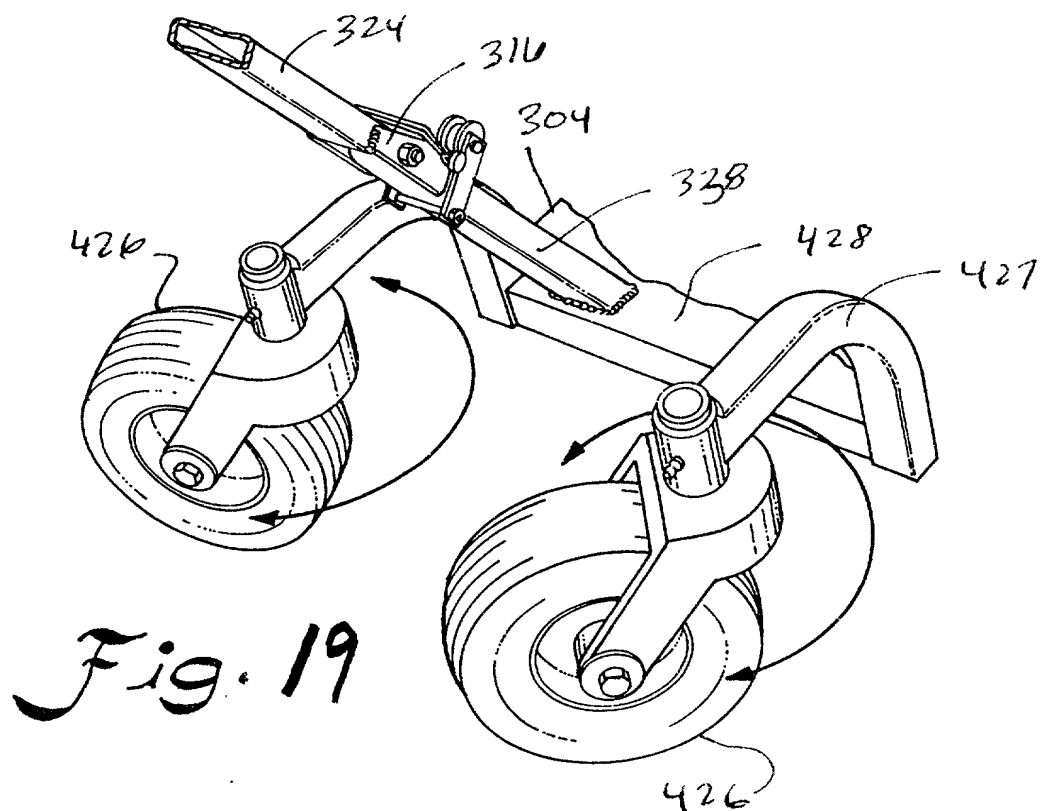


Fig. 19

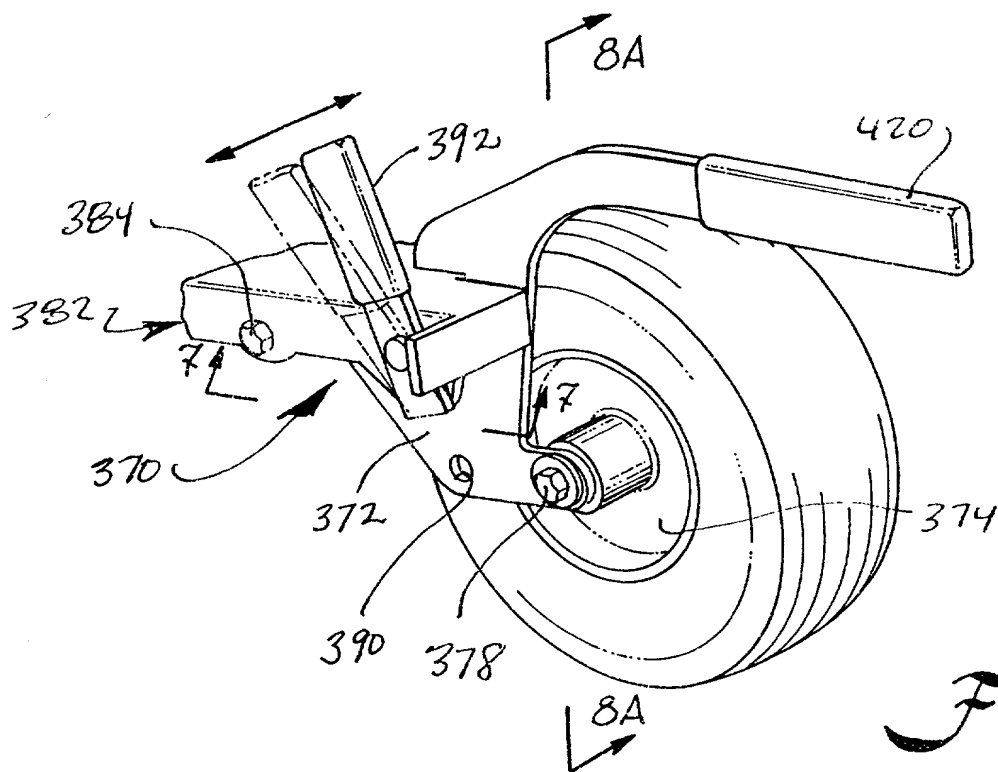


Fig. 20

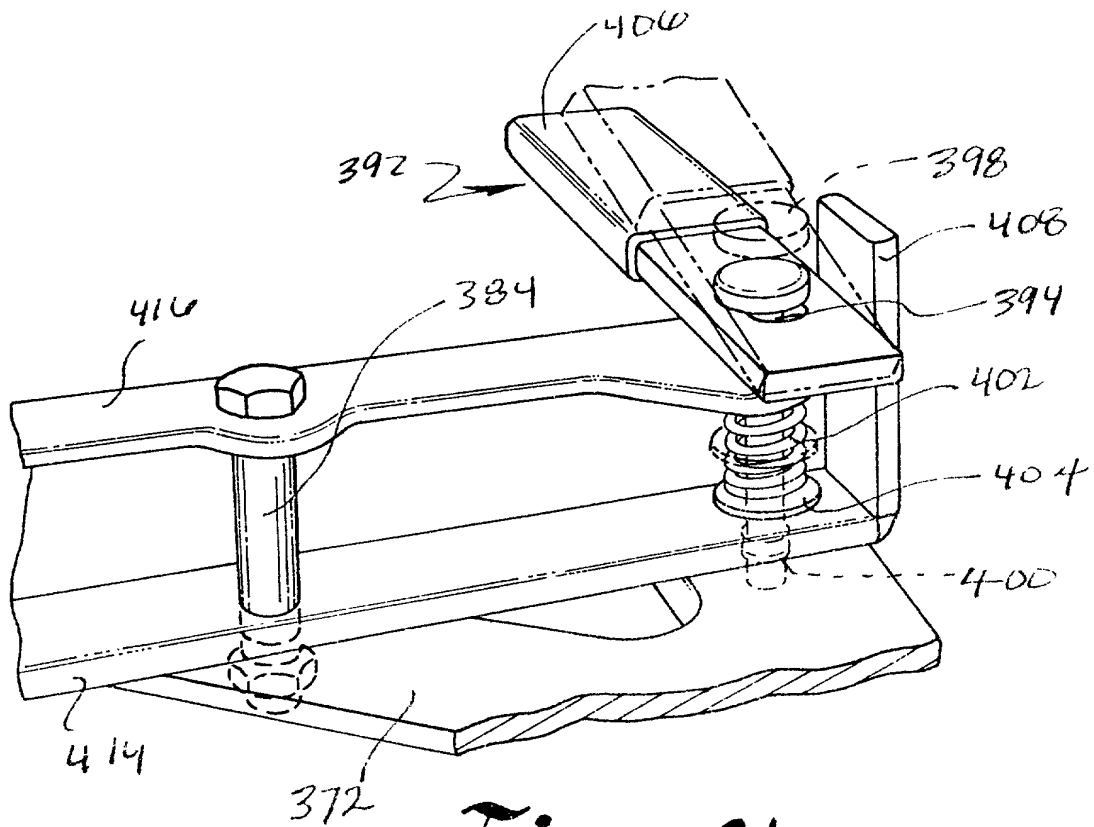


Fig. 21

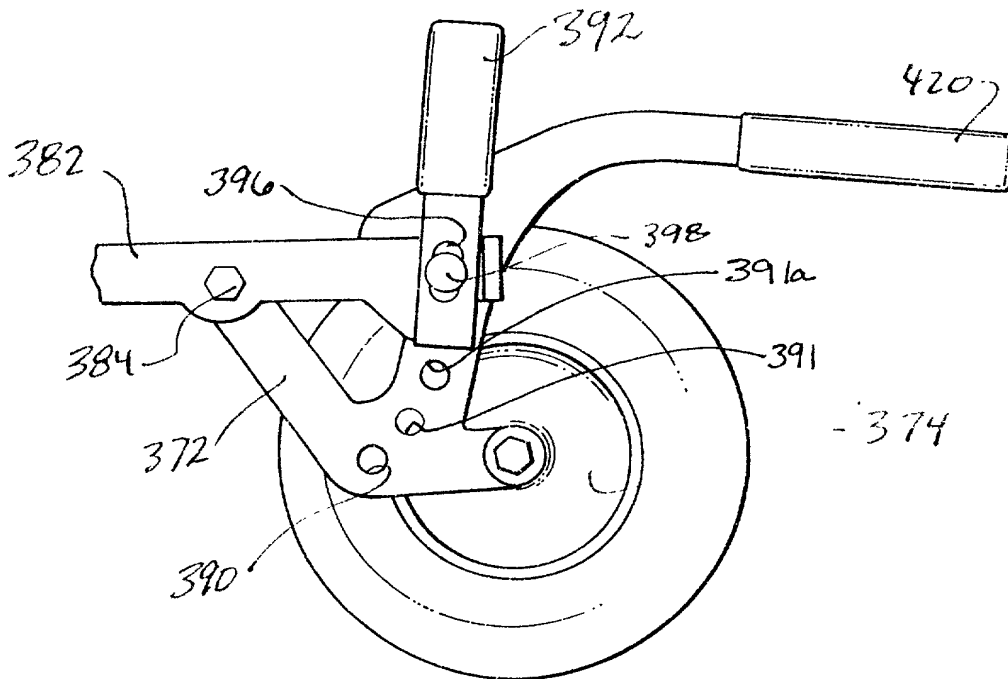


Fig. 22

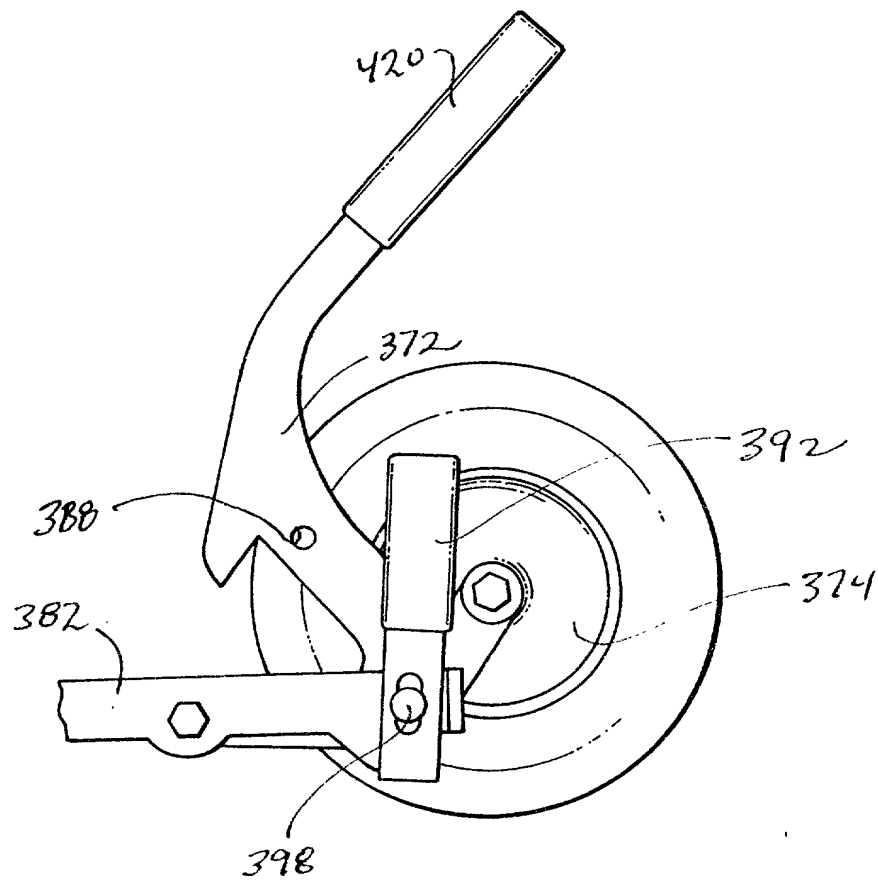
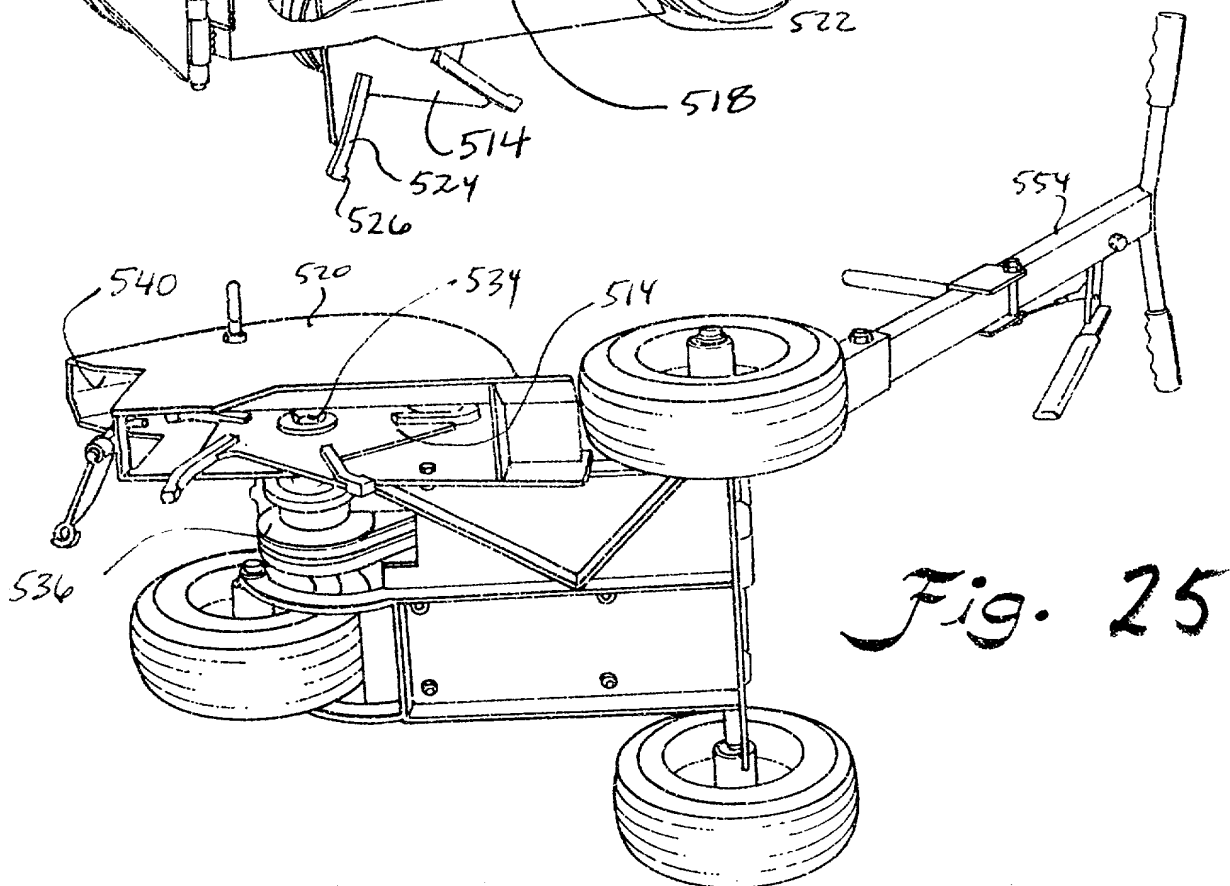
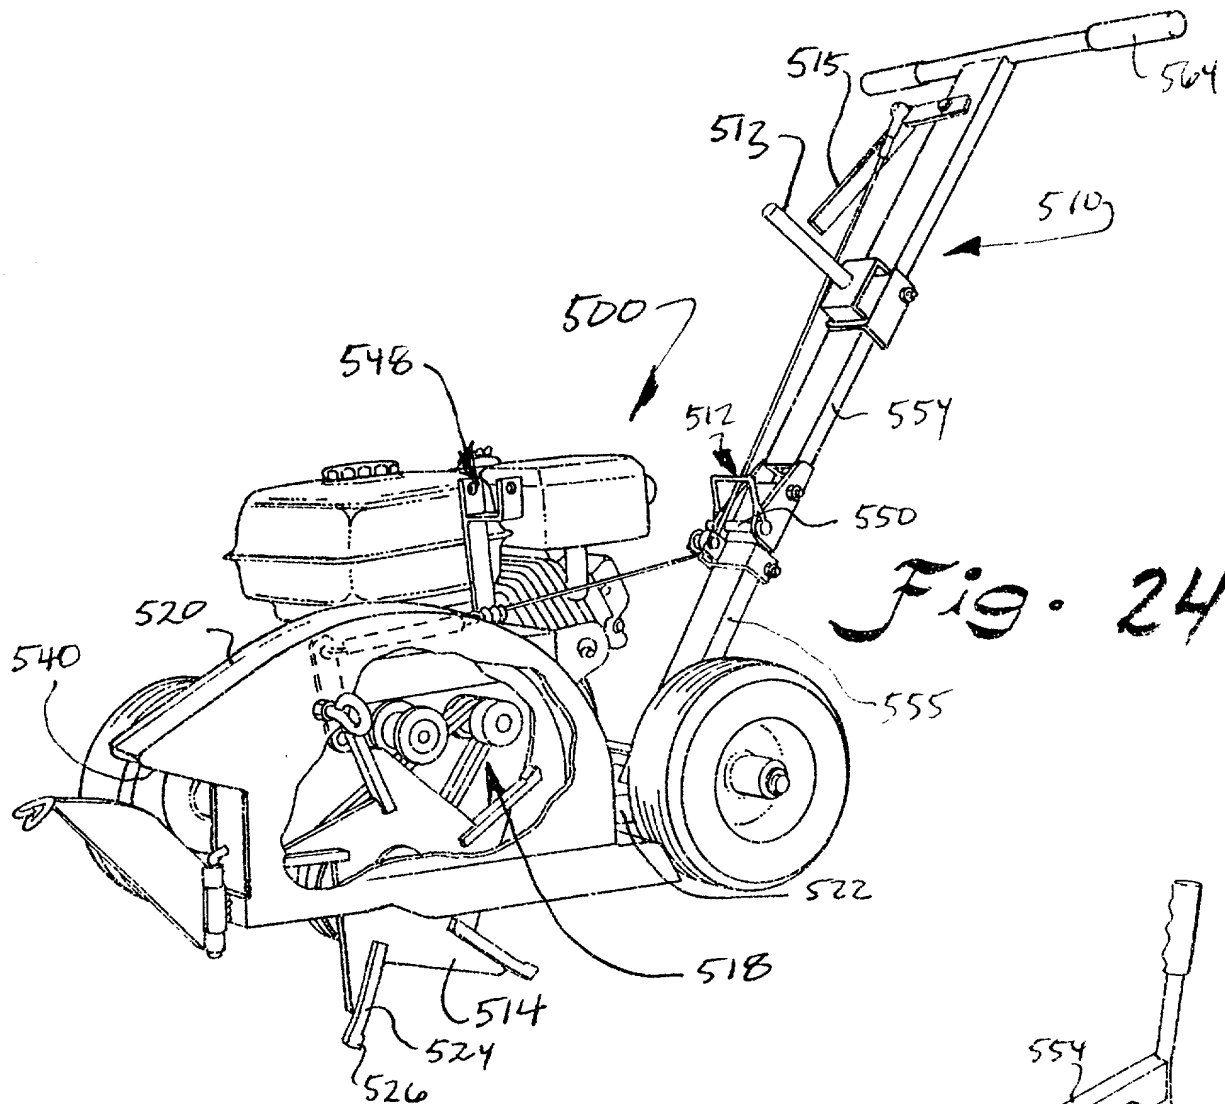



Fig. 23





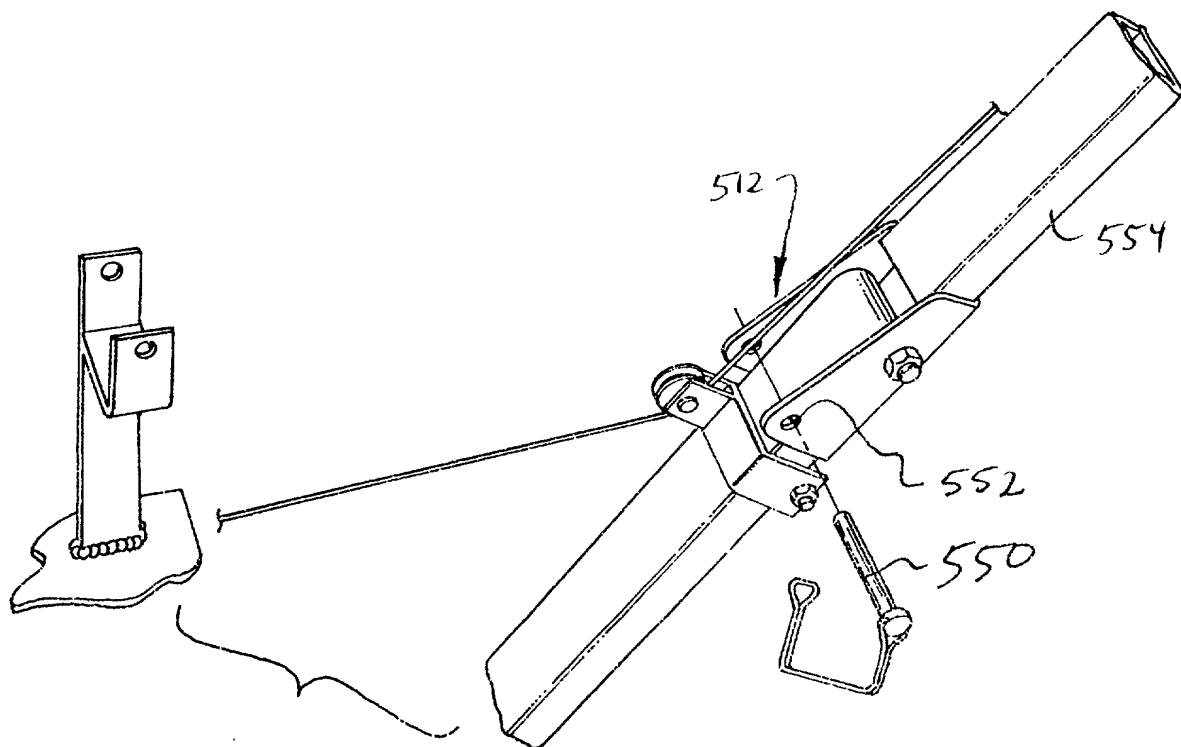


Fig. 27

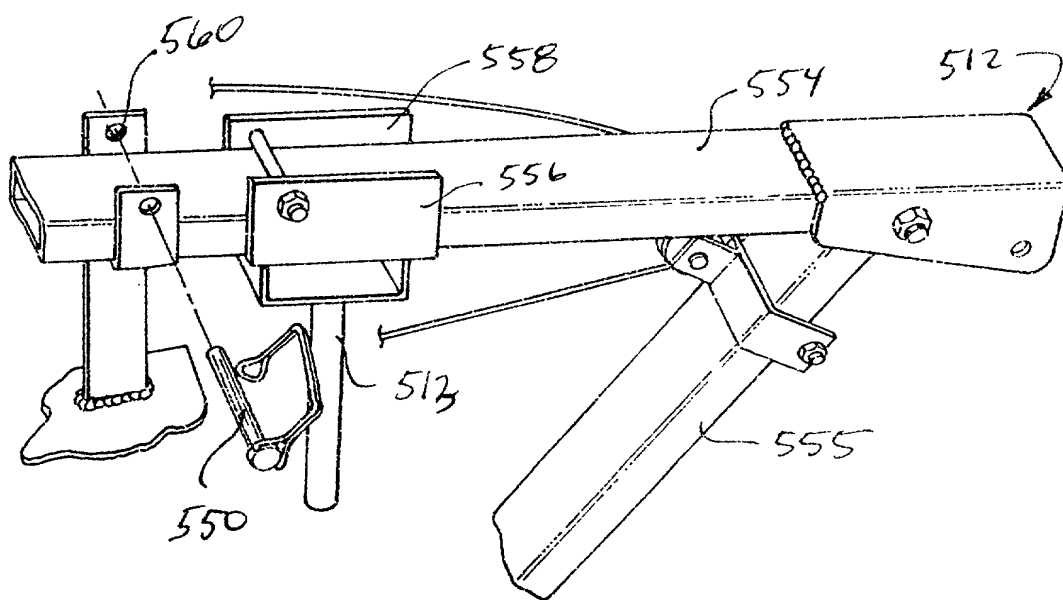


Fig. 28



09966477.092804

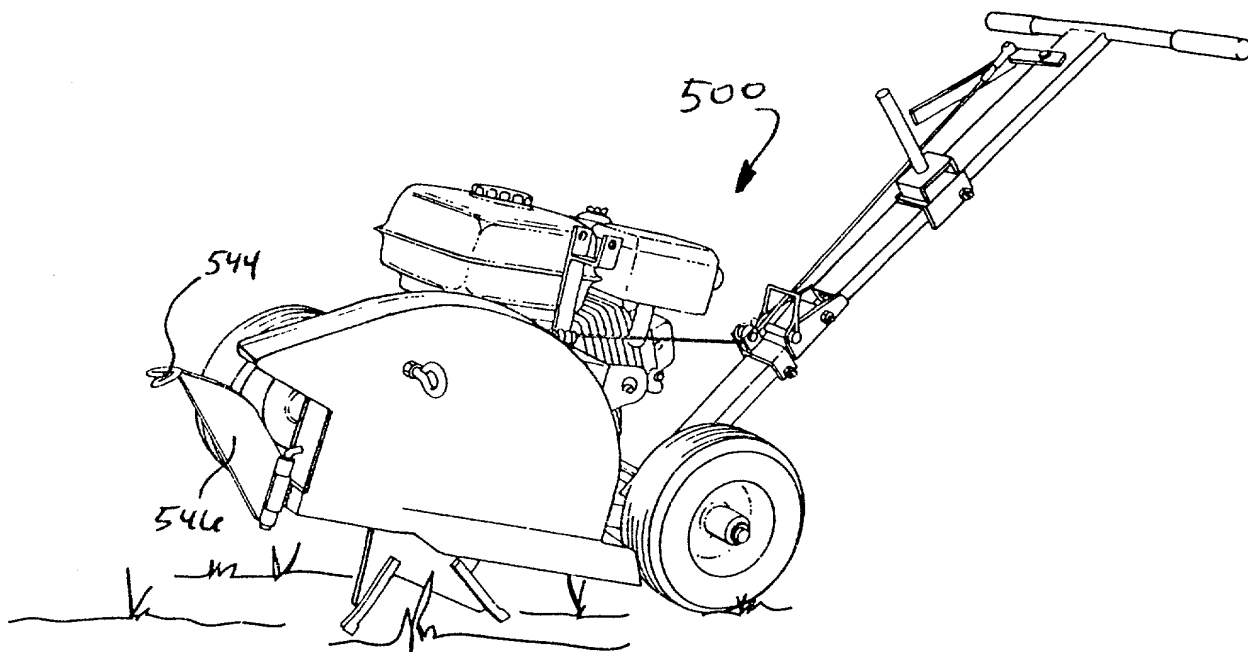


Fig. 29

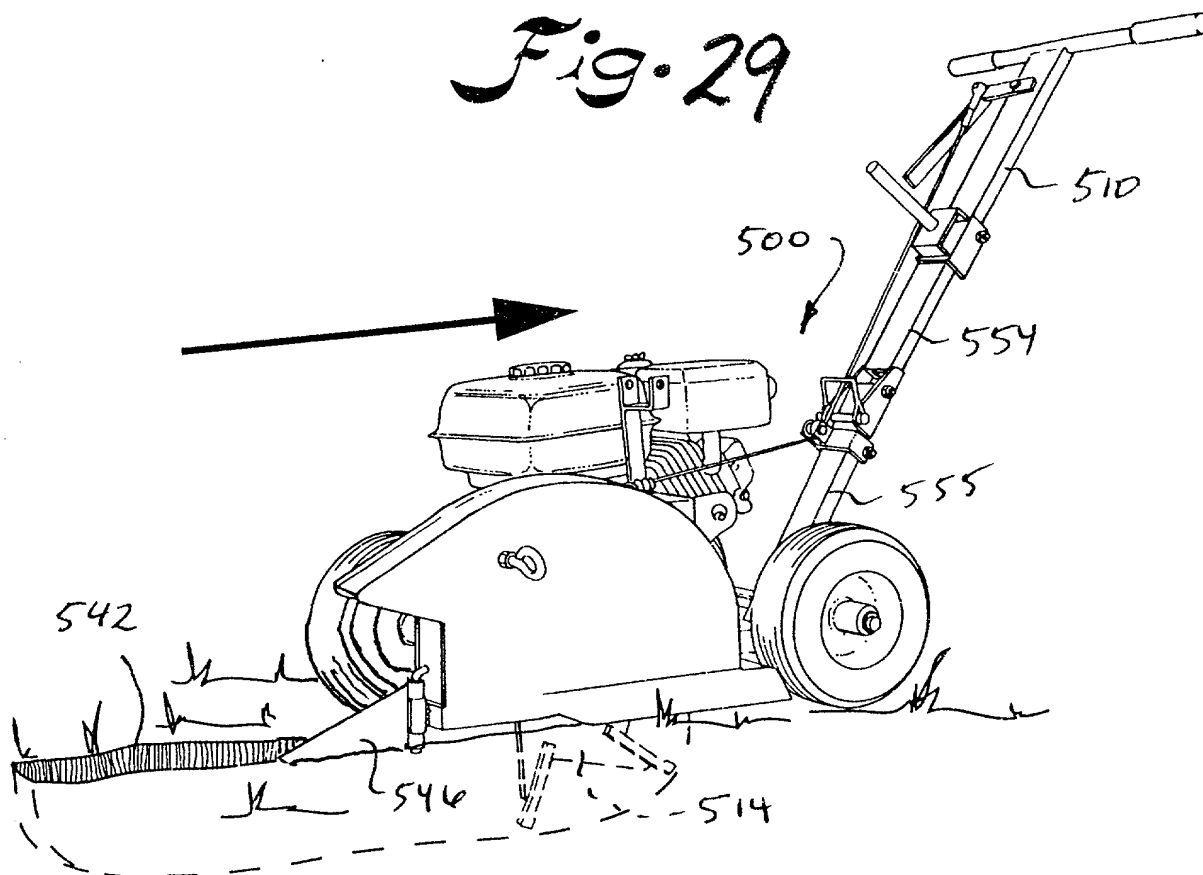


Fig. 30

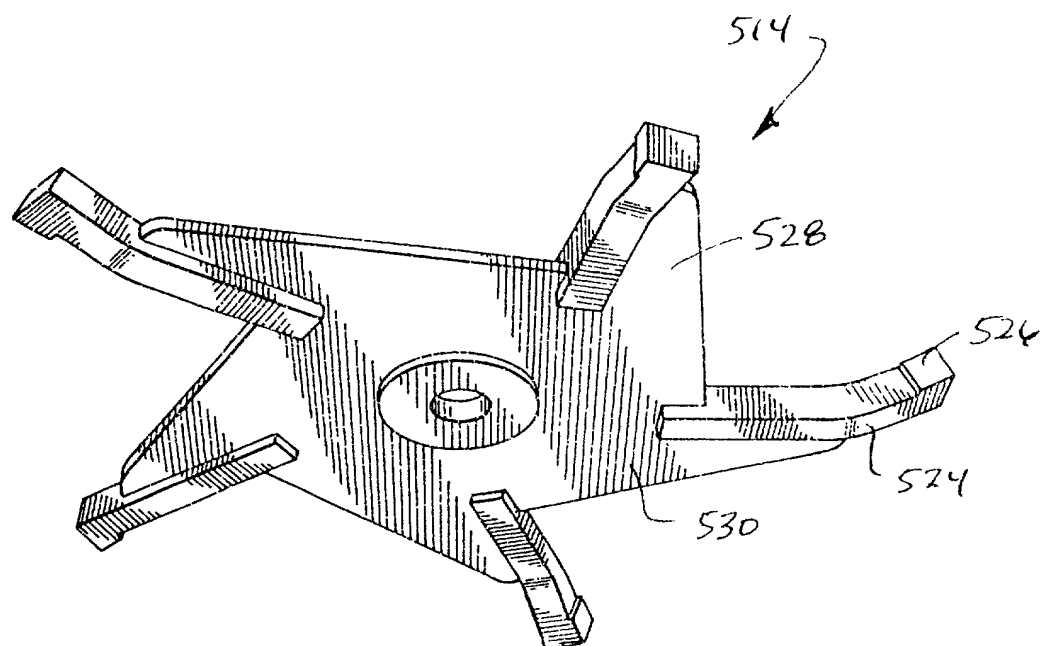


Fig. 31

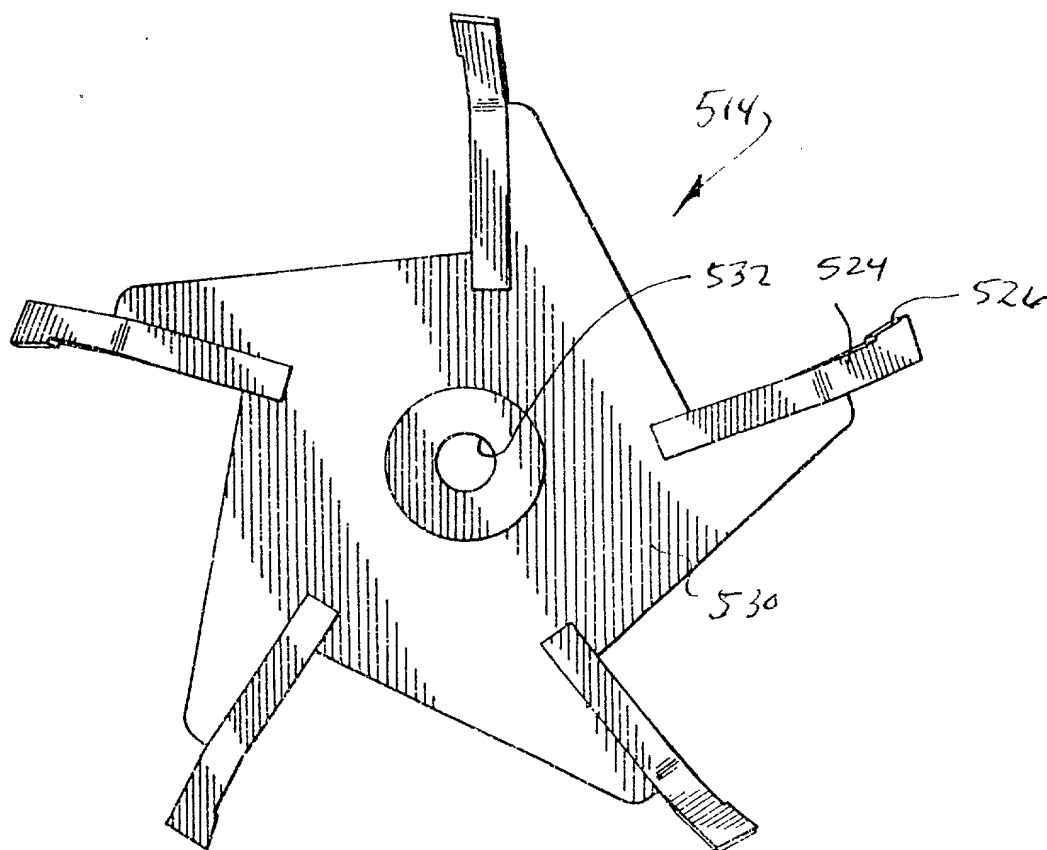


Fig. 32

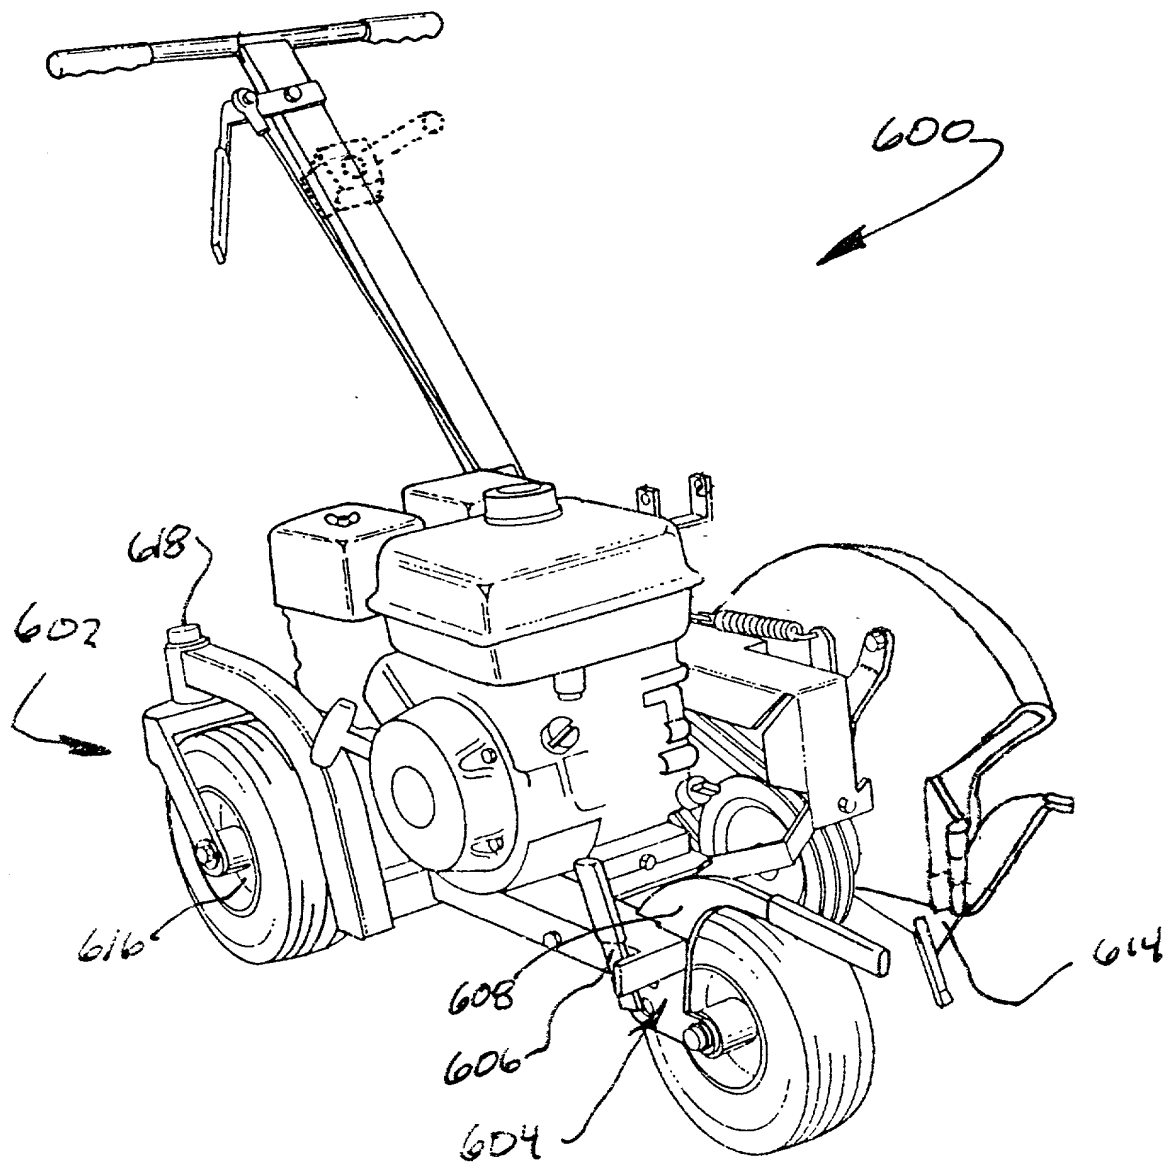


Fig. 33